




New Products for
Dyna-Tite™

KV BRACKET

The KV bracket enhances the Dyna-Tite suspension system by the addition of an integral bracket, which fastens the cable lock to the duct with sheet metal screws. Once the KV bracket is attached to the duct, the wire rope "drop" is passed into the entry hole at the top of the bracket, through the cable lock, and out the exit hole at the bottom. The locking teeth inside the cable lock engage the wire rope and secure the ductwork in place. The KV12 Bracket assembly and the CL12 have a working load limit of up to 150 lbs, depending upon the wire rope utilized.

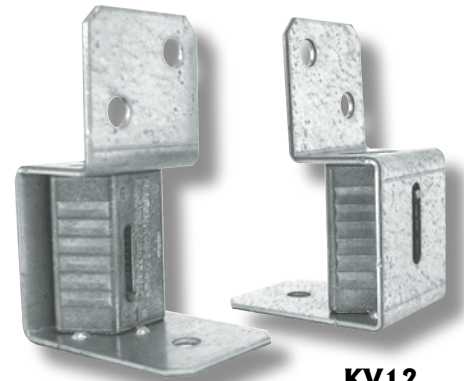


KV12

Patent Pending

Ordering Information			
Item #	Code	Description	Quantity
30361	KV12	Bracket Assembly with CL12 for use with 1/16in or 3/32in cable	100 per carton
30351	CL12	Cable Lock (Only) for use with 1/16in or 3/32in cable	100 per carton

CL18 CABLE LOCK

The Dyna-Tite CL18 Cable Lock is for use with 3/32 inch and 1/8 wire rope. Depending upon the wire rope utilized, the CL18 has a working load limit of up to 225 lbs. As with all Dyna-Tite cable locks, the CL18 features an easy release pin for simple adjustments without the use of tools. Dyna-Tite Cable locks have a safety factor of five times their allowable working load.



CL18

Ordering Information			
Item #	Code	Description	Quantity
30354	CL18	Cable Lock for use with 3/32in or 1/8in cable	100 per carton

Duro Dyne East Division, Bay Shore, NY **631-249-9000** **Fax: 631-249-8346**
Duro Dyne Midwest Division, Fairfield, OH **513-870-6000** **Fax: 513-870-6005**
Duro Dyne West Division, Santa Fe Springs, CA **562-926-1774** **Fax: 562-926-5778**
Duro Dyne Canada, Lachine, Quebec, Canada **514-422-9760** **Fax: 514-636-0328**
www.durodyne.com **E-mail: durodyne@durodyne.com**

