

SUPER-SPRAYFAST™

ADHESIVE APPLICATING SYSTEM FOR WATER-BASED ADHESIVES

ITEM # 5150 (5 GALLON) & ITEM # 5155 (55 GALLON)

Our new, improved Super Sprayfast incorporates an acetal/teflon diaphragm pump **circulating system** and **surge tank** to provide quick, easy and even spray, with minimal overspray.



ITEM# 5150
is for 5 gallon

ITEM# 5155
is for 55 gallon

Machine is
complete as shown.
(Adhesive not included.)

Ease of Operation

Place the pump (factory mounted to the cover) on top of the adhesive container. Attach the air-line to the Super Sprayfast pump. The pump is self-priming and charges the spray gun quickly. A 15-foot hose gives the operator plenty of freedom of movement.

Versatile

The Super Sprayfast is designed for use with 5 gallon pails or 55 gallon drums of water-based adhesive. The system is shipped with a drum or pail cover; depending upon which unit you order. Additional covers are available.

Quick Clean-Up

Simply disconnect the air and depress the trigger switch to relieve fluid pressure. Submerge the spray gun and air cap in water. For extended clean-up, hook up the Super Sprayfast to a container of warm water and activate the trigger switch.

Reliable


The acetal and teflon air operated diaphragm pump coupled with the circulating system keeps the adhesive fresh. The built in surge tank helps maintain an even spray. The spray gun is constructed of aluminum and stainless steel to resist corrosion.

Safe

The Super Sprayfast has been designed for use with Duro Dyne's WIT, WSA and SSG water-based adhesives. These adhesives are nonflammable and contain zero solvents. No venting is required.

MACHINERY DIVISION
© 2007 Duro Dyne Corporation
Printed in USA 08/2007
BC005402

DURO
DYNE®

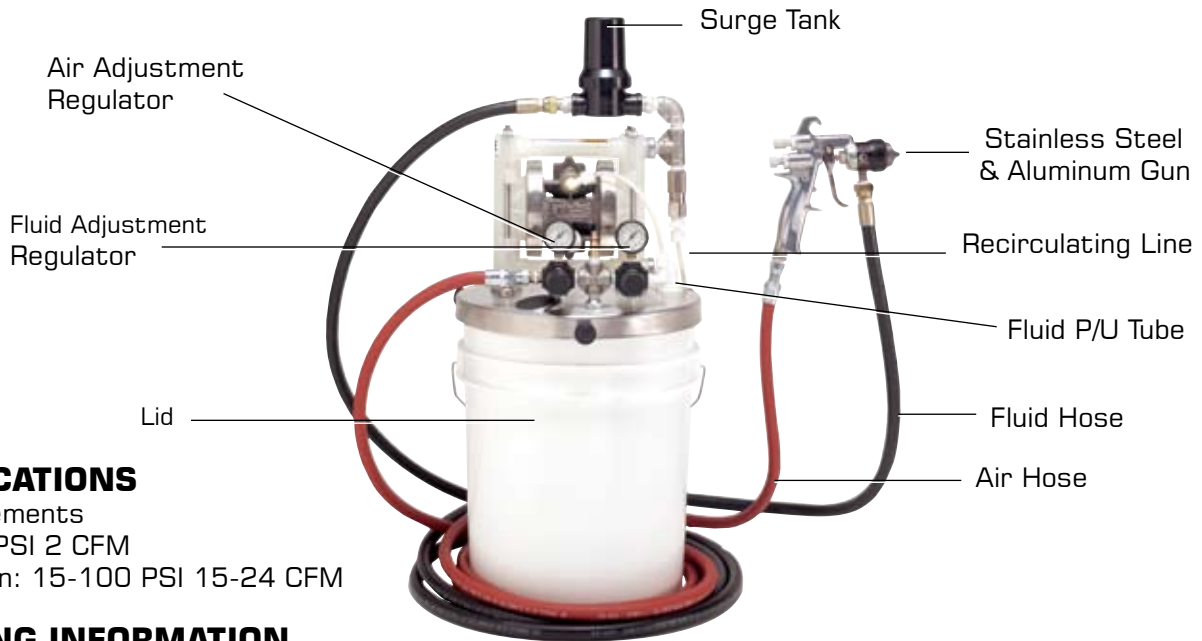

SPECIFICATIONS

Air Requirements
 Pump: 80 PSI 2 CFM
 Atomization: 15-100 PSI 15-24 CFM

ORDERING INFORMATION

Item#	Description
5150	Super Sprayfast for use with 5 gallon pail of water-based adhesive.
5155	Super Sprayfast for use with 55 gallon drum of water-based adhesive.

The Super Sprayfast is specifically designed for use with Duro Dyne Water-Based Adhesives.

SSG

Waterbased Insulation Adhesive

Type: Ethylene Vinyl Acetate Emulsion
Color: Cream White
Weight: 10.0 lbs. per gallon
Odor: Bland
Solids: 69%±2%
Viscosity: 1400 CPS, (Brookfield LVF #7 6 RPM @ 25°C)
Flammability: Non-Flammable
Effect of Freezing: Keep from freezing
Shelf Life: 6 months @ 70°F
Service Temperature Range: -40° - 200°F
Clean-up: Warm water/detergent
Availability: 5 gallon pails.



ORDERING INFORMATION

Item# 5035 SSG-5 5 Gal. Cans

WIT

Waterbased Insulation Adhesive

Type: Resin Emulsion
Color: White
Weight: 9.8 lbs. per gallon
Odor: Bland
Solids: 57%±2%
Viscosity: 1600-1800 CPS. Typical at 1800. (Brookfield LVF #4 Spindle, 6 RPM @ 25°C)
Flammability: Non-Flammable
Effect of Freezing: No damage - 1 cycle
Shelf Life: 6 months @ 70°F
Service Temperature Range: -40° - 200°F
Clean-up: Water/Detergent
Availability: 1 gallon buckets, 5 gallon pails and 55 gallon drums.



ORDERING INFORMATION

Item# 5056 WIT-1 1 Gal. Buckets
 Item# 5057 WIT-5 5 Gal. Pails
 Item# 5058 WIT-55 55 Gal. Drums

WSA

Waterbased Insulation Adhesive

Type: Resin Emulsion
Color: Grey
Weight: 9.8 lbs. per gallon
Odor: Bland
Solids: 57%±2%
Viscosity/Extrusion: 1600-1800 CPS. Typical at 1800. (Brookfield LVF #4 Spindle, 6 RPM @ 25°C)
Flammability: Non-Flammable
Effect of Freezing: No damage - 1 cycle
Shelf Life: 6 months @ 70°F
Service Temperature Range: -40° - 200°F
Clean up: Water/Detergent
Availability: 5 gallon pail, 55 gallon drums.



ORDERING INFORMATION

Item# 5036 WSA-5 5 Gal. Pails
 Item# 5037 WSA-55 55 Gal. Drums

Duro Dyne East Division, Bay Shore, NY
Duro Dyne Midwest Division, Fairfield, OH
Duro Dyne West Division, Santa Fe Springs, CA
Duro Dyne Canada, Lachine, Quebec, Canada

631-249-9000 Fax: 631-249-8346
513-870-6000 Fax: 513-870-6005
562-926-1774 Fax: 562-926-5778
514-422-9760 Fax: 514-636-0328

www.durodyne.com E-mail: durodyne@durodyne.com