




DUAL DYN-O-CLAW™

Ductwork is often reinforced with conduit to minimize movement caused by positive or negative pressures. These conduits can twist inside the duct during transit or installation.

The Dual Dyn-O-Claw is designed to join the cross section of conduits to immobilize them which further strengthens the duct. It also eliminates any vibration or rattling sound of crossing conduit. Working in conjunction with Dyn-O-Mate Rod Locks and conduit, the Dual Dyn-O-Claw creates an effective duct strengthening system and are easier and faster than other alternatives such as ties or welding. The Dual Dyn-O-Claw works for both 1/2in and 3/4in conduit.

FEATURES

- Works for both 1/2" and 3/4" conduit
- Manufactured from 14 gauge galvanized steel
- Steel bolt secures the Dyn-O-Claw onto the Conduit

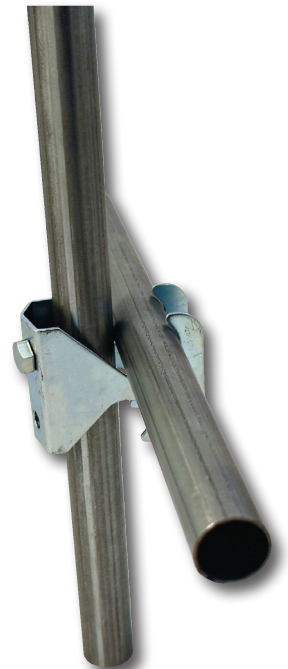

Item #	Code	Description	Weight (lbs.)	Packaging
21298	DOMOC1234	Dual Dyn-O-Claw 1/2in & 3/4in	53.75 lbs.	250/box

Duro Dyne Corporate Headquarters, Bay Shore, NY
631-249-9000 • Fax: 631-249-8346
Duro Dyne Midwest • Duro Dyne West • Duro Dyne Canada
www.durodyne.com • E-mail: durodyne@durodyne.com



© 2017 Duro Dyne Corp.
Printed in USA 10/3/17
BF013429