

DYN-O-LOC

Conduit can be used to support duct sizes over 48" or smaller duct in high pressure applications. Dyn-O-Locs insert into the hollow ends of conduit to provide a means of attaching the conduit to the duct.

ITEM #	CODE	DESCRIPTION	Packaging
21097	DOMRL12	1/2" Dyn-O-Loc*	250/Box
21098	DOMRL34	3/4" Dyn-O-Loc*	250/Box
25004	DOMRL312	1/2" Dyn-O-Loc w/ 3" Bolt	250/Box
25005	DOMRL334	3/4" Dyn-O-Loc w/ 3" Bolt	250/Box
25002	SWW31420	3" Dyn-O-Loc Bolt w/ Washer	250/Box
21008	SN12-250	1/2" Dyn-O-Loc Spring Nut Only	250/Box
21009	SN34-250	3/4" Dyn-O-Loc Spring Nut Only	250/Box
21286	SWW1420-250	1/4-20" Dyn-O-Loc Bolt w/ Washer	250/Box

*Dyn-O-Locs included with Rod Lock Insertion Machine.



Available for use with
1/2" or 3/4" Conduit



Locks conveniently packed
in separate poly bag.

Bolts (with washer attached)
packed underneath locks.



Installed lock is pull tested
to withstand over 1900 lbs.

Large self-sealing
washer

We put the washer
on the bolt, so you
don't have to!




Long bolt for
easier installation

D-STUD

The D-Stud is a Dyn-O-Loc with the threaded stud pre-attached.

- Properly installed D-Studs are pull tested to over 1300 lbs.
- Anchors conduit in place during installation.
- Works with both insulated and non-insulated duct work.
- Allows for the installer to easily locate the pre-drilled hole.

ITEM #	CODE	DESCRIPTION	Packaging
13021	DS12K-250	1/2" Dyn-O-Loc D-Stud Kit	250/Box
13023	DS34K-250	3/4" Dyn-O-Loc D-Stud Kit	250/Box
13025	DS12-250	1/2" Dyn-O-Loc D-Stud Only	250/Box
13027	DS34-250	3/4" Dyn-O-Loc D-Stud Only	250/Box
13029	DSGW-250	Dyn-O-Loc D-Stud Gasket Washer	250/Box
13031	DSFN-250	Dyn-O-Loc D-Stud Flange Nut	250/Box





ROD LOC INSERTION MACHINE & DUAL DYN-O-CLAW™

ROD LOC INSERTION MACHINE



The Rod-Loc Insertion Machine offers contractors a fast and convenient way to set up rod locks and conduit. It runs off of a standard 110 volt outlet and a 70 PSI minimum air supply. Simply place either 3/4" or 1/2" conduit in the cradle and a rod loc on each side, and by the flip of a switch the air cylinder inserts a rod lock on both ends simultaneously of hollow conduit at the perfect inset spacing, eliminating the old timely hammer in method!



ITEM #	CODE
43009	WVDL1234



Each machine is packed with a bag of both 1/2" and 3/4" Dyn-O-Locs to get you started!

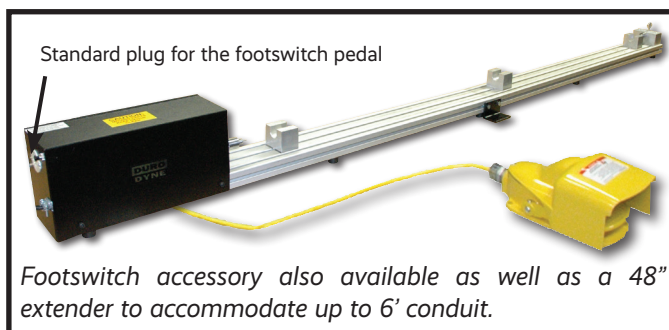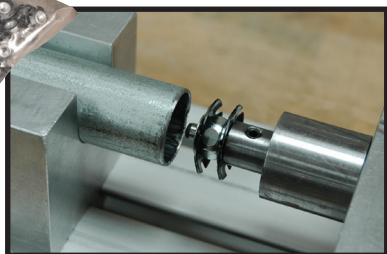

Standard plug for the footswitch pedal

Footswitch accessory also available as well as a 48" extender to accommodate up to 6' conduit.

For more details, please see our Rod Loc Insertion Machine Literature Sheet.

DUAL DYN-O-CLAW

The Dual Dyn-O-Claw is designed to join conduits and eliminate their vibration in the duct. Dual Dyn-O-Claws are easier and faster than other alternatives such as ties or welding, and work on both 1/2" and 3/4" conduit.



**Works for 1/2" &
3/4" conduit**



The Dyn-O-Claw is designed to join conduits for more stability and to eliminate their vibration in the duct

Easier and faster than other alternatives such as ties or welding

ITEM #	CODE	DESCRIPTION	Weight (lbs.)	Packaging
21298	DOMDOC1234	Dual Dyn-O-Claw 1/2" & 3/4"	40	250/Box