


MODEL RH PINSPOTTER


ROLLING HEAD ITEM #27186

RH MACH 705

The RH Mach 705 Pinspotter features a more efficient transformer that provides a wider range of welding capabilities. The Heavy Duty Vibrator Bowl and base weld pins up to 2". A floating upper weld tip and an optional lift kit are among some of the improvements to this Pinspotter. The RH Mach 705 also features a notch on the support bar to easily accommodate TDC/TDF duct. The ability to move the trolley instead of the ductwork minimizes material handling. An auxilliary gun & ground cable box has been added to offer the ability to convert this machine to a handheld pinspotter (10ft gun & ground cable sold separately).

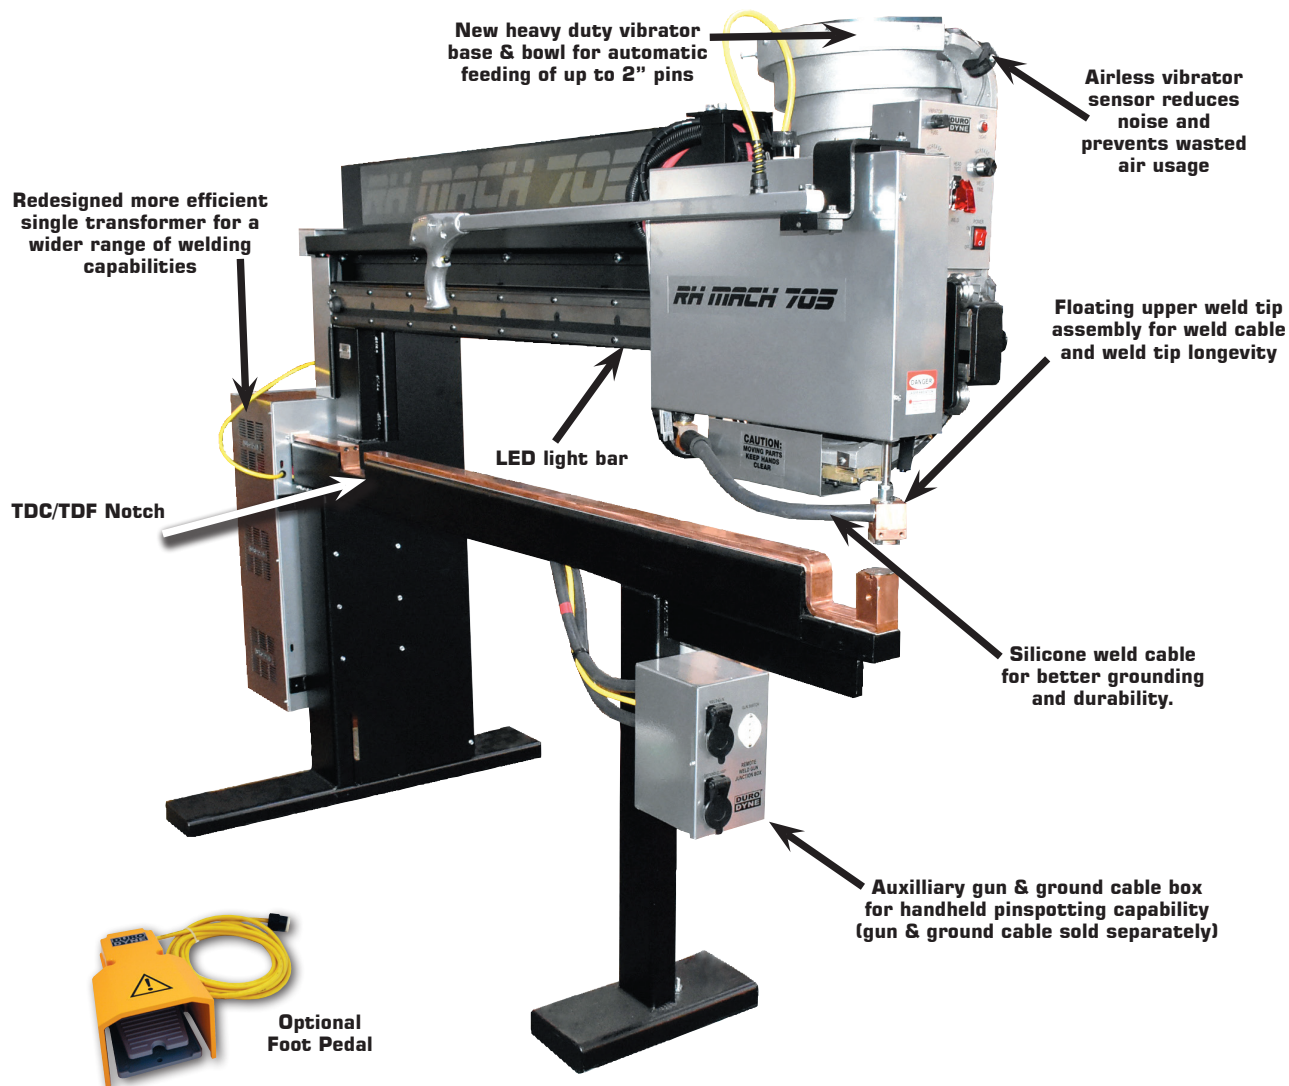

For best performance,
use genuine Duro Dyne insulation fasteners

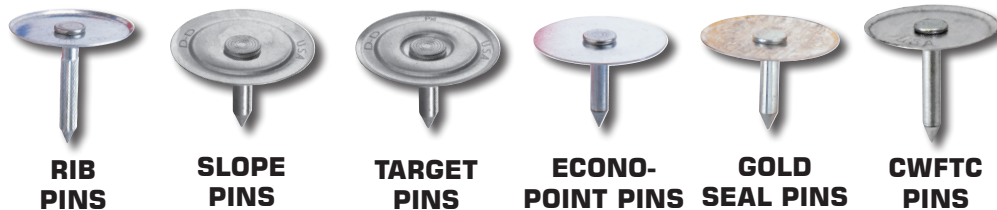

7/15/2026

**DURO
DYNE**®

FEATURES

TROUBLE-FREE MOVEMENT

Precision polished and hardened tracks combined with ground bearings, assure trouble-free movement of the trolley assembly.

SOLID-STATE COMPONENTS

Components proven under rigorous shop usage, control the pneumatic and weld circuitry. Few adjustments are required.

CONVENIENTLY LOCATED CONTROLS

One knob adjustment sets the weld and dwell times for perfect welds every time.

ELECTRONIC FEED TRACK SENSOR

An electronic sensor controls the vibrator to assure a full feed track of pins when ready for welding. Reloading is as easy as positioning the trolley assembly at the front of the machine.

MULTI-TAP TRANSFORMER

The new multi-tap transformer allows for 8 different power settings to accommodate a wider range of welding capabilities more efficiently.

18 GAUGE CAPACITY

With a custom designed high powered transformer, the RH will weld up to 4" pins to 18 gauge effortlessly.

PNEUMATIC BRAKE

A pneumatic brake cylinder locks the rolling assembly in position during weld cycle to ensure a quality weld.

PROTECTIVE HARNESS

A specially designed flexible harness protects the air line and weld cable from incidental damage and assures fatigue-free movement.

FIXED HEAD FOOT PETAL WELDING

To convert the RH for fittings, draw the welding tip to open end of frame and slide the quick release pin into position locking the weld tip over the fittings mandrill.

FOOTSWITCH

The footswitch frees the operator for handling of small fittings and odd shapes. It features a protective covering to minimize the accidental actuation of the machine. 16 foot cable length.

BALL TRANSFER (OPTIONAL)

Roller feed tables with ball transfers adjoining the RH enable work to be easily positioned by the operator; in many cases with just one hand. Productivity is increased and worker fatigue minimized.

Ball Transfers
DD Item #27025
Code: BT100



GUN & GROUND CABLE (OPTIONAL)

10ft gun & 10 ft ground cable convert this bulk feed pnsptter to be utilized for handheld pinspotting.

Item # 17281
10ft Hand Gun & Ground Cable Set



SPECIFICATIONS

ELECTRICAL:

Input voltage: 230V, 60 Hz single phase, 60 amp service.

AIR REQUIREMENTS:


Input pressure of 80 psi.

THROAT SIZE:

A 60" throat allows fasteners to be placed up to 1.5" from each edge of a 5' sheet without repositioning.

RIB PIN CAPACITY:

The vibrator bowl holds approximately 1,000, 1 inch fasteners. Fasteners of .5" to 2" in length may be fed automatically.

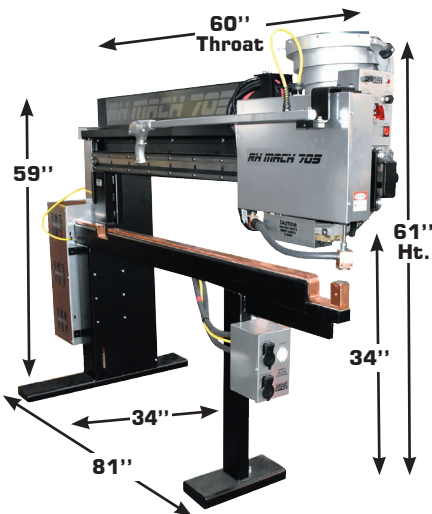

Note: For best performance, use genuine Duro Dyne insulation fasteners

Duro Dyne East Division, Bay Shore, NY

631-249-9000 Fax: 631-249-8346

www.durodyne.com E-mail: durodyne@durodyne.com