

SUBMITTAL RECORD

JOB _____
 LOCATION _____
 SUBMITTED TO _____
 SUBMITTAL PREPARED BY _____
 APPROVED BY _____
 DATE _____



Submittal Form

Duro-Twist™ Regulator

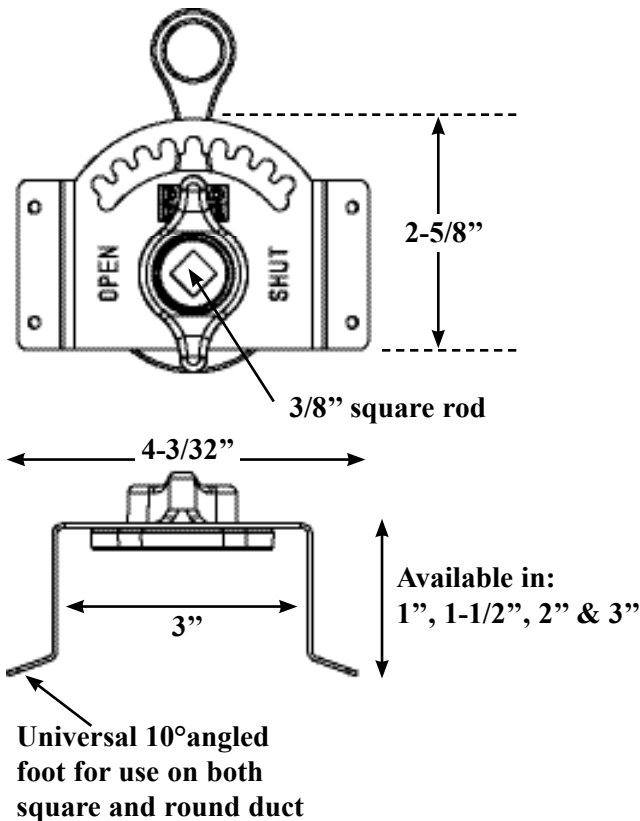
DURO-TWIST™ REGULATOR

The Duro-Twist is a hand operated elevated regulator designed for use with square rod on both square and round externally insulated duct. It is offered in two standoff heights, 1-1/2" & 2". The Duro-Twist is engineered with a strong friction resistance so it stays set without any need to lock it in place. The high visibility yellow handle allows it to be easily found in the field on wrapped duct. The handle position illustrates damper blade position on the outside of the ductwork.

- Two Sizes: 1-1/2", 2",
- Manual operation (no tools)
- 10° angled stand for both square and round duct



The wing nut has a locking feature molded into the nut. This secure locked fit eliminates any movement from duct system vibration.

**Materials****Bracket:**

- 1.2 mm Steel – Cold Rolled Steel ASTM A-1008
- 18 gauge
- Hot dipped zinc galvanized steel.

Handle & Nut:

- Nylon 6.6
- Conforms to UL1995 Standards Code for Heating and Cooling CSA-C22.2 No. UL1995
- Flammability Rating: 5VA

DURO-TWIST				
ITEM#	CODE	SHAFT SIZE	STAND HEIGHT	QTY
6324	DT38150	3/8" sq.	1-1/2"	100

Duro Dyne Corporate Headquarters, Bay Shore, NY
 631-249-9000 • Fax: 631-249-8346

Duro Dyne Midwest • Duro Dyne West • Duro Dyne Canada
 www.durodyne.com • E-mail: durodyne@durodyne.com



©2022 Duro Dyne Corporation
 Printed in USA 9/15/22
 BO008463