

SUBMITTAL RECORD


JOB _____
 LOCATION _____
 SUBMITTED TO _____
 SUBMITTAL PREPARED BY _____
 APPROVED BY _____
 DATE _____




Submittal Form TH, IP - Instrument Test Ports

The **Instrument Test Port** has a durable cast zinc alloy construction with a heavy gauge zinc plated cap. Its Neoprene Expansion Plug can withstand up to 180°F and has resisted pressures up to 90 psi when installed. The TH-1 accommodates 1" of insulating materials and has an inside diameter of 1-1/16". The IP-2 accommodates 2" of insulation material and has an inside diameter of 1-1/8". The IP-4 offers a 3/4" diameter access to the air stream. All are designed for high velocity systems. A flat neoprene mounting gasket is supplied. However, for maximum protection against leakage, we recommend using Duro Dyne Red High Temperature Silicone, item #5113.


TH-1

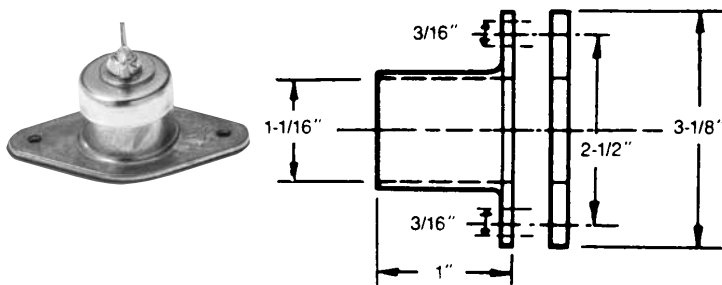

IP-2

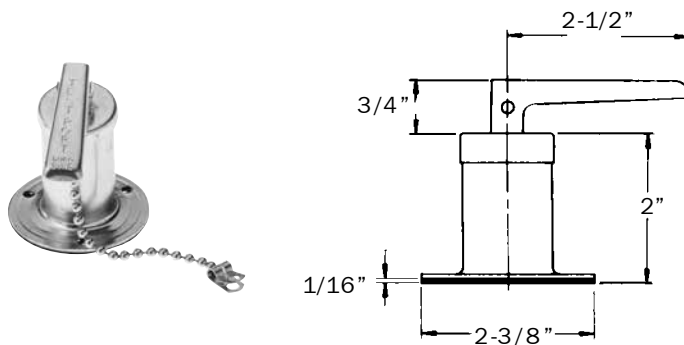

IP-4

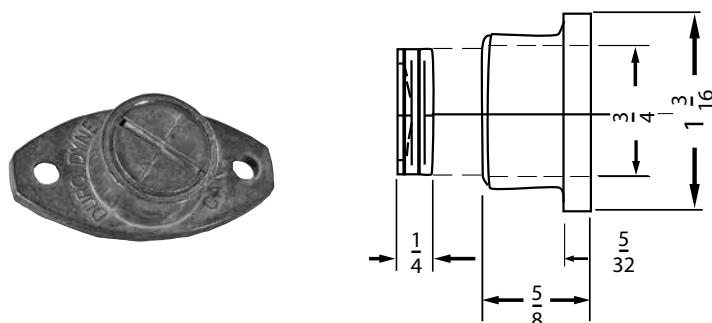

INSTRUMENT TEST PORTS		
ITEM#	CODE	QTY PER CARTON
8036	TH1	25
8398	IP2	10
8340	IP4	25

Duro Dyne Corporate Headquarters, Bay Shore, NY
 631-249-9000 • Fax: 631-249-8346

Duro Dyne Midwest • Duro Dyne West • Duro Dyne Canada
 www.durodyne.com • E-mail: durodyne@durodyne.com



©2020 Duro Dyne Corporation
 Printed in USA 12/2020
 BO008453