

SUBMITTAL RECORD

JOB _____
 LOCATION _____
 SUBMITTED TO _____
 SUBMITTAL PREPARED BY _____
 APPROVED BY _____
 DATE _____



Submittal Form

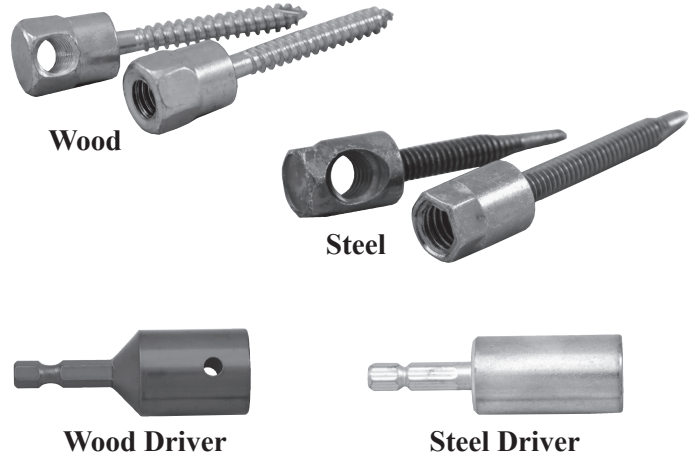

Quik-Twists

DESCRIPTION

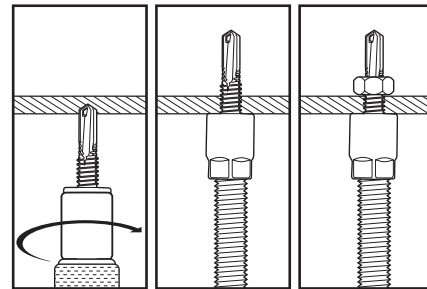
When preparing to suspend HVAC equipment, ductwork or accessories, threaded anchor points are often required. Quik-Twists from Duro Dyne are side or vertical mounted fasteners that provide attachment points for steel threaded rods and other assemblies. There are two variations of Quik-Twists; one for penetrating and threading into steel and one for wood. Each Quik-Twist has a 3/8"-16 threaded hole in the fastener's hex shaped head. Side mounted Quik-Twists have the threaded hole perpendicular to the fastener shaft and passing completely through the fastener head. Vertical mounted Quik-Twists have the threaded hole parallel to the fastener shaft and as deep as the fastener head.

FEATURES

- No pilot hole is needed for Quik-Twists
- All fasteners are zinc plated for corrosion resistance
- Chucks sold separately for easy installation

**Wood**

Install with appropriate sized wood socket driver.

Steel

Install with appropriate sized steel socket driver.

Item #	Code	Description	Thread	Hang	Driver	Threaded Rod Size	Ultimate Tensile Load (lbs)	Packaged
30224	SHW38-25	3/8" x 2" Wood Hanger Sidewinder	1 x 4" x 2"	Horizontal	30257	3/8"	1,800	25/Ctn.
30226	VHW38-25	3/8" x 2" Wood Hanger Vertical Winder	1 x 4" x 2"	Vertical	30257	3/8"	1,510	25/Ctn.
30225	SHS38-25	3/8" x 2" Steel Hanger Sidewinder	1/4-20	Horizontal	30239	3/8"	3,530	25/Ctn.
30227	VHS38-25	3/8" x 2" Steel Hanger Vertical Winder	1/4-20	Vertical	30239	3/8"	2,375	25/Ctn.

Please see our Dyna-Tite testing and warnings webpage for the most detailed list of warnings:
<http://www.durodyne.com/DTTesting.php>

Duro Dyne Corporate Headquarters, Bay Shore, NY
 631-249-9000 • Fax: 631-249-8346

Duro Dyne Midwest • Duro Dyne West • Duro Dyne Canada
www.durodyne.com • E-mail: durodyne@durodyne.com



©2020 Duro Dyne Corporation
 Printed in USA 12/8/2020
 BO030432