

SUBMITTAL RECORD

JOB _____
 LOCATION _____
 SUBMITTED TO _____
 SUBMITTAL PREPARED BY _____
 APPROVED BY _____
 DATE _____



Submittal Form

Rapit® Tabbed Duct Support Hangers

DESCRIPTION


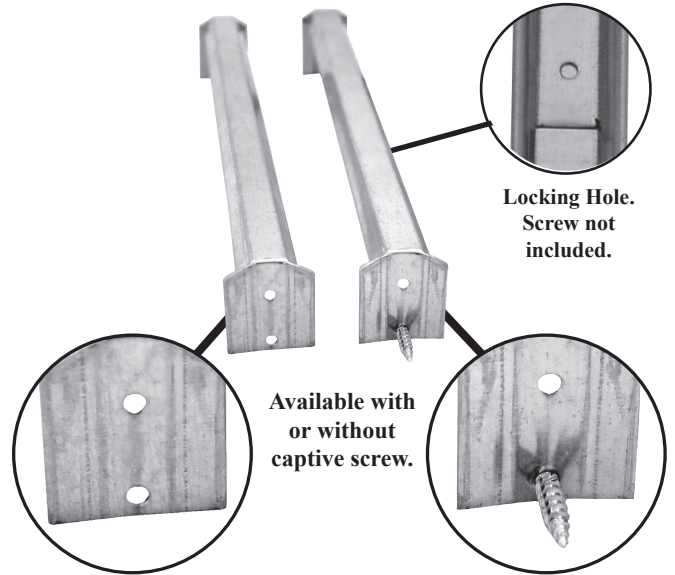
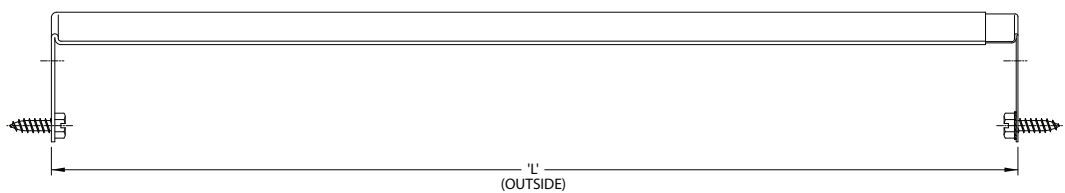

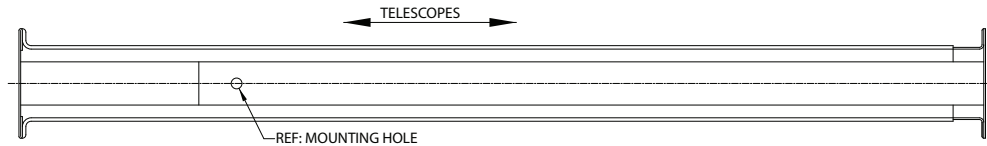
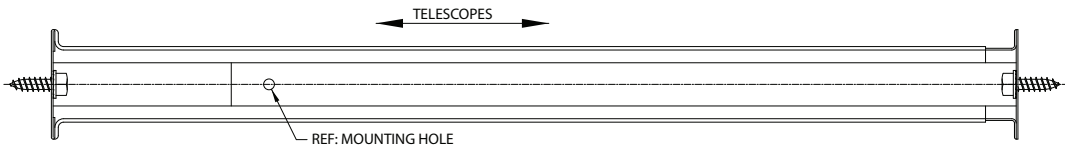
Duct Support Brackets are used primarily in residential application to create a platform between ceiling joists for ductwork to rest on.

The Rapit Tabbed Duct Support Hanger from Duro Dyne is manufactured of 26/28 gauge steel to support a high load rating. The precise angles create a smooth telescoping action. Telescoping allows for widths of 11-19" or 18 to 33".

All Rapid Duct Support Hangers feature a pre-drilled mounting hole to immobilize the telescoping and secure the bracket to duct.

FEATURES

- Wide mounting pad
- Rigid support system
- Pre-drilled mounting hole to immobilize the telescoping and secure the bracket to duct
- Heavy gage point is part of the bracket not spot welded on
- Tabbed hangers are available with our without captive screw
- 11"-19" or 18"-33" sizes
- Smooth telescoping

**TABBED****TABBED WITH SCREW**

Item #	Code	Description	Length ('L')	Packaging
30024	RTH19	Rapit Tabbed Duct Support Hanger Expandable 11"-19"	11" - 19"	50 per carton
30025	RTH33	Rapit Tabbed Duct Support Hanger Expandable 18"-33"	18" - 33"	50 per carton
30060	RTHS19	Rapit Tabbed Duct Support Hanger w/ Screw Expandable 11"-19"	11" - 19"	50 per carton
30061	RTHS33	Rapit Tabbed Duct Support Hanger w/ Screw Expandable 18"-33"	18" - 33"	50 per carton

See reverse side for Pointed version.

Duro Dyne Corporate Headquarters, Bay Shore, NY
 631-249-9000 • Fax: 631-249-8346

Duro Dyne Midwest • Duro Dyne West • Duro Dyne Canada
 www.durodyne.com • E-mail: durodyne@durodyne.com



©2018 Duro Dyne Corporation
 Printed in USA 8/21/18
 BO030427

SUBMITTAL RECORD

JOB _____
 LOCATION _____
 SUBMITTED TO _____
 SUBMITTAL PREPARED BY _____
 APPROVED BY _____
 DATE _____



Submittal Form

Rapit® Pointed Duct Support Hangers

DESCRIPTION

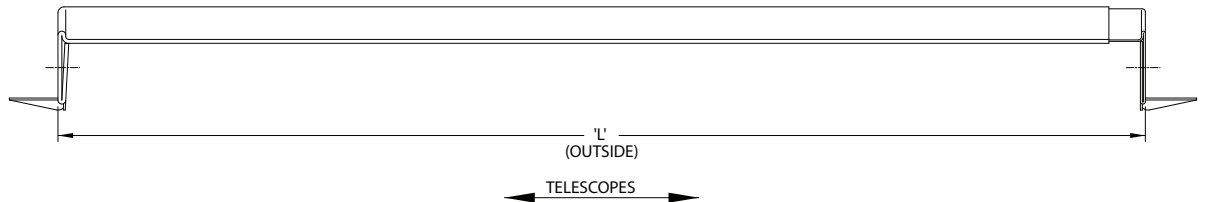

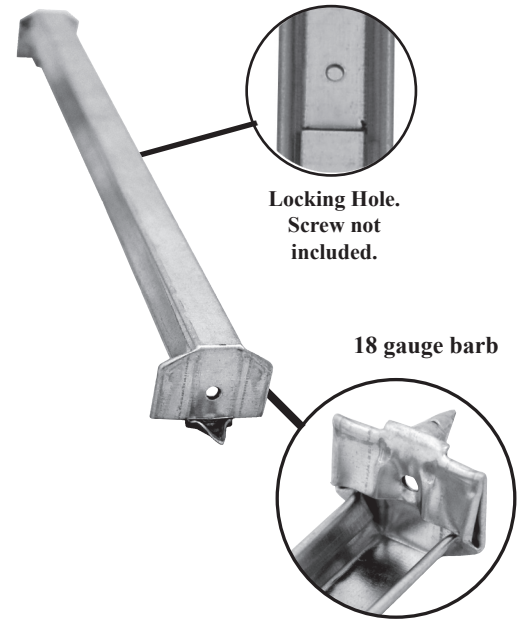
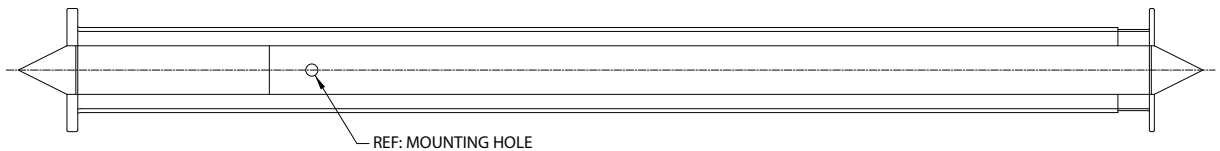
Duct Support Brackets are used primarily in residential application to create a platform between ceiling joists for ductwork to rest on.

The Rapit Point Duct Support Hanger from Duro Dyne is manufactured of 26/28 gauge steel to support a high load rating. The precise angles create a smooth telescoping action. Telescoping allows for widths of 11-19" or 18 to 33". All Rapid Duct Support Hangers feature a pre-drilled mounting hole to immobilize the telescoping and secure the bracket to duct.

The Rapit Point Duct Support Bracket features an integral 18 gauge self-nailing tip that is part of the bracket, not spot welded on. It penetrates dense wood easily.

FEATURES

- Wide mounting pad
- Rigid support system
- Pre-drilled mounting hole to immobilize the telescoping and secure the bracket to duct
- Self nailing integral barbed design on Pointed style
- Heavy gage point is part of the bracket not spot welded on
- 11"-19" or 18"-33" sizes
- Smooth telescoping

**POINTED**

Item #	Code	Description	Length ('L')	Packaging
30021	RPH19	Rapit Point Duct Support Hanger Expandable 11"-19"	11" - 19"	50 per carton
30022	RPH33	Rapit Point Duct Support Hanger Expandable 18"-33"	18" - 33"	50 per carton

See reverse side for Tabbed version.

Duro Dyne Corporate Headquarters, Bay Shore, NY
 631-249-9000 • Fax: 631-249-8346

Duro Dyne Midwest • Duro Dyne West • Duro Dyne Canada
 www.durodyne.com • E-mail: durodyne@durodyne.com



©2018 Duro Dyne Corporation
 Printed in USA 8/21/18
 BO030427