




# INSULATION FASTENING




# PRODUCT CATALOG

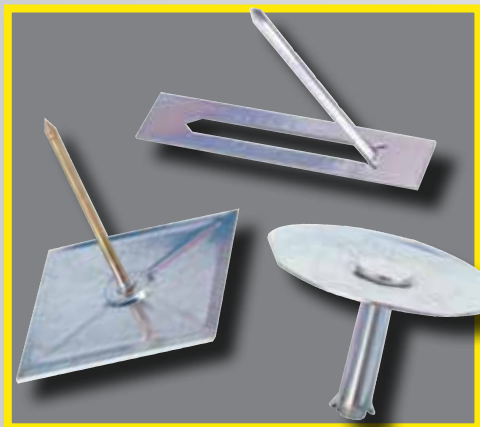


# WELD TYPE FASTENERS

Duro Dyne Insulation Fasteners provide a means of securing duct liner to the duct work. They are available in a variety of styles, which all feature a precision formed point to insure constant penetration of the duct liner. Once the duct liner is pierced, the fastener is in firm electrical contact with the duct work and the pinspotter current securely welds the fastener in place.

Duro Dyne Insulation Fasteners are for use with MF, FPP, PBF, FG, RH, FGMH, and HSMH pinspotters.

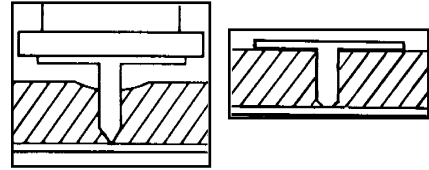


## GOLD SEAL PINS SELF SEALING PIN

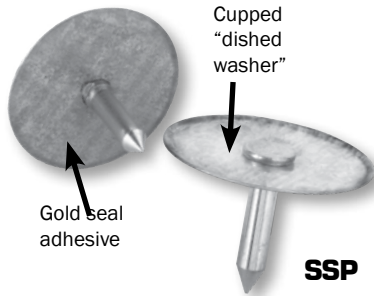

Gold Seal (SSP) pins are considered self sealing pins due to a heat activated gold adhesive on the underside of the washer which secures the pin to the liner facing during the welding process. Gold Seal Pins also feature "dished washers". Do not store at or above 110°F or pins may stick together.

Item#	Bulk#	Code/Bulk Code	Duct Liner Size	Quantity
n/a	26297	<b>SSPB12</b>	1/2in	1 TH/5 TH
26194	26294	SSP34/ <b>SSPB34</b>	1in	1 TH/5 TH
26195	26295	SSP100/ <b>SSPB100</b>	1in HD	1 TH/5 TH
n/a	26293	<b>SSPB1F</b>	Foam	1 TH/5 TH
n/a	26299	<b>SSPB118</b>	1in HD	1 TH/3 TH
n/a	26300	<b>SSPB150</b>	1-1/2in	1 TH/3 TH
26196	26296	SSP200/ <b>SSPB200</b>	2in	1 TH/3 TH
n/a	26305	<b>SSPB250</b>	2-1/2in	3 TH
26303	n/a	SSP300	3in	1 TH
26304	n/a	SSP400	4in	1 TH

## CAPACITOR DISCHARGE PINS SELF SEALING PIN



Capacitor Discharge Gold Seal (CDSSP) pins were designed to work perfectly with our Capacitor Discharge Spotwelders. They feature a heat activated gold adhesive on the underside of the washer which secures the pin to the liner facing during the welding process. CDSSP pins are manufactured from 12 gauge steel and feature a "dished washer". Do not store at or above 110°F or pins may stick together.

Item#	Bulk#	Code/Bulk Code	Duct Liner Size	Quantity
26376	26382	CDSSP12/ <b>CDSSPB12</b>	1/2in	1 TH/5 TH
26377	26383	CDSSP34/ <b>CDSSPB34</b>	1in	1 TH/5 TH
26378	26384	CDSSP100/ <b>CDSSPB100</b>	1in	1 TH/5 TH
26379	26385	CDSSP118/ <b>CDSSPB118</b>	1in HD	1 TH/3 TH
26380	26386	CDSSP150/ <b>CDSSPB150</b>	1-1/2in	1 TH/3 TH
26381	26387	CDSSP200/ <b>CDSSPB200</b>	2in	1 TH/3 TH


## RIB PIN®



Duro Dyne Rib Pins (CP) have dished washers, ribbed nails for faster post weld cooling and precision points to assure uniform quality.

Item#	Bulk#	Code/Bulk Code	Pin Size	Duct Liner Size	Quantity
26023	26028	CP12/ <b>CPB12</b>	1/2in	1/2in	1 TH/5 TH
26024	26029	CP34/ <b>CPB34</b>	3/4in	1in	1 TH/5 TH
26025	26030	CP100/ <b>CPB100</b>	1in	1in HD	1 TH/5 TH
26032	26035	CP118/ <b>CPB118</b>	1-1/8in	1in HD	1 TH/3 TH
26026	26031	CP150/ <b>CPB150</b>	1-1/2in	1-1/2in	1 TH/3 TH
26027	26038	CP200/ <b>CPB200</b>	2in	2in	1 TH/3 TH

## TARGET PINS®



Patent #6,497,543

Target (BDEP) pins are a patented insulation fastener designed with an aerodynamic embossed washer and a recessed nail head to improve the quilting contour of the secured duct liner.



\*Sold in buckets

Item#	Code	Pin Size	Duct Liner Size	Quantity*
26220	BDEP12	1/2in	1/2in	5 TH
26221	BDEP34	3/4in	1in	5 TH
26222	BDEP100	1in	1in HD	5 TH
26217	BDEP118	1-1/8in	1in HD	3 TH
26218	BDEP150	1-1/2in	1-1/2in	3 TH
26219	BDEP200	2in	2in	3 TH
26216	BDEP218	2-1/8in	2in HD	3 TH

# WELD TYPE FASTENERS

## SLOPE PINS®



CTC

Sloped Washer (CTC) pins are low cost insulation fasteners designed to provide a strong mechanical anchor point for duct liner and a smooth transition from the insulation surface to the quilting depression.

Item#	Code	Pin Size	Duct Liner Size	Quantity
26228	CTC12	1/2in	1/2in	5 TH
26229	CTC34	3/4in	1in	5 TH
26230	CTC100	1in	1in HD	5 TH
26231	CTC118	1-1/8in	1in HD	3 TH
26232	CTC150	1-1/2in	1-1/2in	3 TH
26233	CTC200	2in	2in	3 TH

## CWFTC CUPPED WASHER WELD PINS



CWFTC

CWFTC Cupped Washer Weld Pins have a cupped washer and utilize a specially pointed nail to assure uniform welding.

Item#	Code	Pin Size	Duct Liner Size	Quantity
26286	CWFTC12	1/2in	1/2in	5 TH
26287	CWFTC34	3/4in	1in	5 TH
26288	CWFTC100	1in	1in HD	5 TH
26289	CWFTC118	1-1/8in	1in HD	3 TH
26290	CWFTC150	1-1/2in	1-1/2in	3 TH
26291	CWFTC200	2in	2in	3 TH
26292	CWFTC218	2in	2in HD	3 TH
26285	CWFTC250	2-1/2in	2-1/2in	1 TH
26172	CWFTC300	3in	3in	1 TH
26172	CWFTC400	4in	4in	1 TH

## ECONO POINT



FTC



Econo Point (FTC) weld pins utilize a specially pointed nail to assure uniform welding.

Item#	Code	Pin Size	Duct Liner Size	Quantity
26072	FTC12	1/2in	1/2in	5 TH
26073	FTC34	3/4in	1in	5 TH
26074	FTC100	1in	1in HD	5 TH
26131	FTC118	1-1/8in	1in HD	3 TH
26226	FTC150	1-1/2in	1-1/2in	3 TH
26227	FTC200	2in	2in	3 TH

TH = Thousand

## PN SPOTTER PIN

The spotter pin is welded to the sheet metal and the insulation is impaled over the nail. It is held in place with the addition of a galvanized steel washer.



After the pins are welded to the duct, (1 pin per sq. ft.), press the insulation onto the pins. Pins used should be 1/4" longer than the insulation thickness. Push clip over pin to hold insulation firmly in place.




PN

PN Spotter pins are manufactured with 14 gauge galvanized steel and are designed for use with LF Handheld Pinspotters.

Item#	Bulk#	Code/Bulk Code	Duct Liner Size	Quantity
26001	26005	PN34/ <b>PNB34</b>	1/2in	1 TH/ <b>15 TH</b>
26002	26006	PN114/ <b>PNB114</b>	1in	1 TH/ <b>15 TH</b>
26004	n/a	PN250	3in	<b>15 TH</b>

## PC SPOTTER CLIPS

PC Spotter Clips are manufactured of 30 gauge galvanized steel and are used for securing insulation with PN spotter pins.



PC



Item#	Bulk#	Code/Bulk Code	Quantity
26017	26019	PC1/ <b>PCB1</b>	1 TH/ <b>15 TH</b>

# MECHANICAL TYPE FASTENERS

## SAH DYNASTICK® SELF ADHESIVE INSULATION HANGER

All Dynastick hangers are sold with a washer.

SAH Dynastick is an insulation hanger with a self-stick base. Just peel the release paper from the hanger base and firmly press the base to the clean duct surface. Impale the insulation over the hanger nail and slip on the locking washer. Self-stick hangers adhere to clean metal surfaces and withstand temperatures of up to 175 °F.

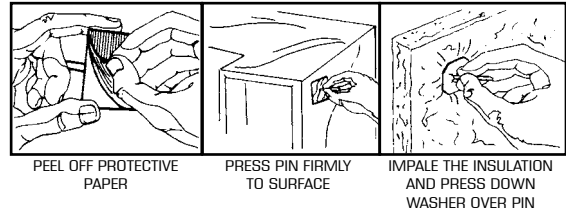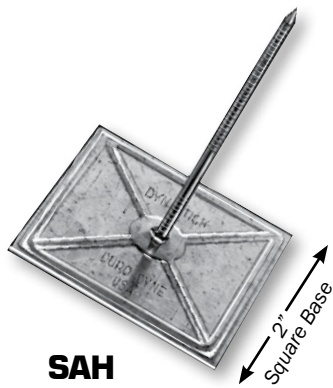


Item#	Bulk#	Code/Bulk Code	Hanger Size	Quantity
26067	26036	SAH34/SAHB34	3/4in	1 TH/500
26068	26037	SAH114/SAHB114	1-1/4in	1 TH/500
26069	26040	SAH134/SAHB134	1-3/4in	1 TH/500
26070	26041	SAH200/SAHB200	2in	1 TH/500
26071	26047	SAH250/SAHB250	2-1/2in	1 TH/500
n/a	26126	SAHB350	3-1/2in	500
n/a	26127	SAHB450	4-1/2in	500

## PBH DYNASTICK® INSULATION HANGER

All Dynastick hangers are sold with a washer.

PBH Dynastick is a perforated base hanger for use with super strength PBA mastic. Simply place a small amount of PBA on a perforated base and firmly press the hanger against the duct surface. Allow the PBA mastic to dry, then, impale the insulation over the hanger nail and slip on the locking washer. Duro Dyne PBA adheres to concrete, metal or wood surfaces and withstands constant temperatures up to 180 °F.



Item#	Bulk#	Code/Bulk Code	Hanger Size	Quantity
n/a	26097	PBHB34	3/4in	500
n/a	26098	PBHB114	1-1/4in	500
n/a	26099	PBHB134	1-3/4in	500
n/a	26100	PBHB200	2in	500
26079	26101	PBH250/PBHB250	2-1/2in	1 TH/500
n/a	26128	PBHB350	3-1/2in	500
n/a	26112	PBHB450	4-1/2in	500

## SILICONE - HEAT RESISTANT - RED




A one-component, non-slumping 100% silicone sealant that cures to a rubbery solid at room temperature upon exposure to water vapor in the air.

- Formulated to perform at temperatures up to 500 °F continuous & 600 °F intermittent exposure.

Item#	Code	Quantity
5113	SSR-C	12/ctn

## LPC1 GALVANIZED STEEL WASHER



**LPC1**

LPC1 washers are included with most mechanical type fasteners. However, they can also be purchased separately.

Item#	Bulk#	Code/Bulk Code	Quantity
26115	26093	LPC1/LPC1B	100/500

# MECHANICAL TYPE FASTENERS

## FLIPSTIX<sup>®</sup> SELF ADHESIVE INSULATION HANGER WITH THE UNIQUE "ONE PIECE" DESIGN

All Flipstix are sold with a galvanized steel, stainless steel or aluminum washer.

A unique insulation hanger with a self stick base. One fastener can be used for insulation up to 2" thick. It is the only fastener available in galvanized, aluminum and stainless steel. Insulation can be secured simply by bending the tip of the extended pin or using supplied washers. Flipstix can be used on any clean metal or painted surface and will withstand temperatures of up to 175 °F.




**PATENT #5,325,964**

Item#	Code	Description	Quantity
26055	FSG250	FlipStix Hanger & Washer Galvanized Steel	1 TH
26056	FSA250	FlipStix Hanger & Washer Aluminum	1 TH
26057	FSS250	FlipStix Hanger & Washer Stainless Steel	1 TH
Item#	Code	Description	Quantity
26050	FSW-G	FlipStix Washer Galvanized Steel	100
26052	FSW-S	FlipStix Washer Stainless Steel	100

## BANGER<sup>®</sup> IMPACT DRIVEN FASTENERS

Easy to install - place the liner over the sheet metal and drive the banger through the insulation. Upon impact, the jaws of the fastener penetrates the metal and locks securely within the thickness of the metal itself. (Always place a hardened steel block behind the sheet metal at the point of impact). Bangers can be installed with model DHH Double Headed Hammer or AB-5 Automatic Banger Setter.

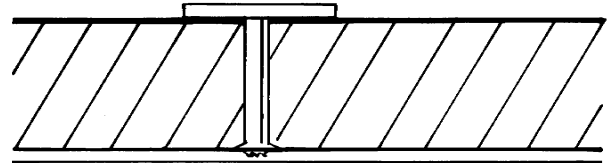

**BG**

Bangers have two prong jaws to fasten to the sheet metal. They are 10 gauge and zinc chromate plated.

Item#	Bulk#	Code/Bulk Code	Duct Liner Size/Weight	Quantity
26033	26095	BGT12/ <b>BGB12</b>	1/2in 2lb	1 TH/5 TH
26044	26096	BGT100/ <b>BGB100</b>	1in 1-1/2lb	1 TH/5 TH

## DOUBLE HEADED HAMMER




16 ounce Double Headed Hammer with 2 powerful magnets embedded in its head, easily keeps fasteners in place. Ergonomic, comfort grip is slip-resistant. Works great with standard Bangers.

Item#	Code	Description
27064	RBH2	Double Headed Hammer




# ADHESIVE APPLICATORS

## SUPER SPRAYFAST UNIVERSAL FOR USE WITH WITM ADHESIVES

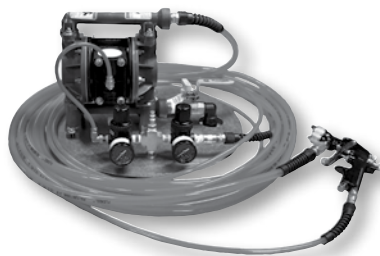


The revamped Universal version of our Super Sprayfast Adhesive Applicator (SSFU) machine makes it possible to use the same applicator on either a 5 gallon bucket or 55 gallon drum. In addition, it now also includes a new flush kit for easy clean up and maintenance. The SSFU features an acetal/teflon diaphragm pump circulating system and surge tank to provide quick, easy and even spray, with minimal overspray.

Item#	Code	Description
5151	SSFU	Super Sprayfast Universal Adhesive Applicator

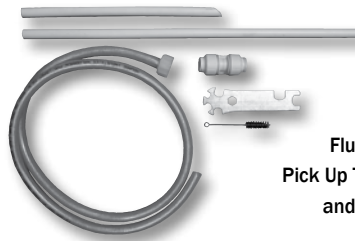

Flush Kit includes:  
Pick Up Tube for 5 gallon pail  
and 55 gallon drum

## GBAC ADHESIVE APPLICATOR FOR USE WITH WITM ADHESIVES

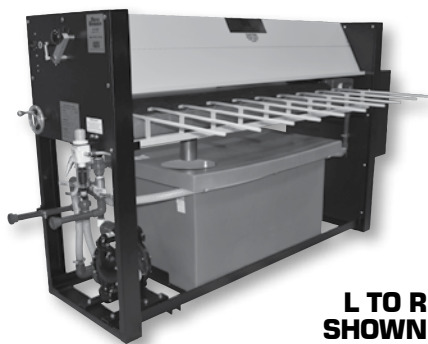

L TO R  
SHOWN

The GBAC applies Duro Dyne WITM water base adhesive to insulation in preparation for application to sheet metal. It requires 110v service fused for 15 amps. A source of air is required. Please specify the direction of work flow when ordering.

Item#	Code	Description
39171	GBAC	Roto Bonder w/Circulating Sys. - left to right flow
39250	GBAC	Roto Bonder w/Circulating Sys. - right to left flow

Scan to watch  
a video



# INSULATION ADHESIVES

## WITM



Water-based Insulation Adhesive specifically designed for Spray, Roller and Brush application. WITM is white in color when applied but dries clear for a clean look. WITM features good wet tack, is non-flammable both in the wet and dry state and is classified by UL (file#R5286). Available in 55 gallon drums.

Item#	Code	Description
5162	WIT55M	High Viscosity Water Base Adhesive

## WITLV-AS / BWITLV-AS



WITLV-AS / BWITLV-AS is a premium, multi-use, water based, non-flammable, UL Classified duct liner and insulation adhesive specifically engineered and formulated for all types of spray, roller, brush or extrusion applications. The LV factor provides a cost effective low viscosity product, with the aim of preventing clogs and providing easy clean up. Airless sprayable and available in white or black.

Item#	Code	Description
5106	WIT5LVAS	WITLV-AS - 5 Gallon Pail - White
5107	WIT50LVAS	WITLV-AS - 50 Gallon Drum - White
5127	BWIT5LVAS	BWITLV-AS - 5 Gallon Pail - Black
5128	BWIT50LVAS	BWITLV-AS - 50 Gallon Drum - Black

# ADHESIVE CANISTERS

Gun and Hose are sold separately.

## NPAB40 & NPAB187 DUAL PURPOSE: LINER ADHESIVE & EDGE COATING!



NPAB40 & NPAB187 are web type, high solids, general purpose adhesives which bonds well to a wide variety of substrates, with one side or two side applications. This black liner adhesive can also be used as an effective edge coating. It has a quick tack, is flexible, non-wrinkling and waterproof. Use on a variety of surfaces including insulation, plastic, wood, ABS, FRP, foam, carpet, wall coverings, fiberglass, packaging, labeling and more.

Item#	Code	Description
5116	NPAB40	Portable Adhesive Canister - Black Solvent Base
5118	NPAB187	Portable Adhesive Canister - Black Solvent Base
5152	NPAC12H	12 ft. Canister Hose
5098	PAC25H	25 ft. Canister Hose
5153	NPAG	Canister Gun with Solvent Base Spray Tip
5101	PAGTS	Replacement Solvent Base Spray Tip
5060	PABT	Edge Coat Spray Tip
5109	PABF	Canister T-Fitting

\*NPAB187 RETURNABLE CYLINDER - For free pick up call 877-262-6079.  
Product # is 17-0000-2161-2

\*\*Where allowed by code and inspection authorities.

## NPAC40 LOW VOC & NO METHYLENE CHLORIDE (DICHLORALMETHANE)!




NPAC40 is a web type, high solids, general purpose adhesive which bonds well to a wide variety of substrates, with one side or two side applications. It has a quick tack, is flexible, non-wrinkling and waterproof. Use on a variety of surfaces including insulation, plastic, wood, ABS, FRP, foam, carpet, wall coverings, fiberglass, packaging, labeling and more.

Item#	Code	Description
5117	NPAC40	Portable Adhesive Canister - Clear Solvent Base
5152	NPAC12H	12 ft. Canister Hose
5098	PAC25H	25 ft. Canister Hose
5153	NPAG	Canister Gun with Solvent Base Spray Tip
5101	PAGTS	Replacement Solvent Base Spray Tip
5109	PABF	Canister T-Fitting

# INSULATION CUTTERS

## PLSU2 AUTOMATIC INSULATION CUTTER FOR USE WITH 1/2 IN. TO 2 IN. LINER

The PLSU2 has a gear driven slitter and a pulley driven cross cut blade which creates a powerhouse to tackle all specialty insulations. This new cutting action will allow the PLSU2 to accommodate virtually all insulation types on the market including closed cell products, cotton fiber, Neoprene, Elastomeric Foam & more.

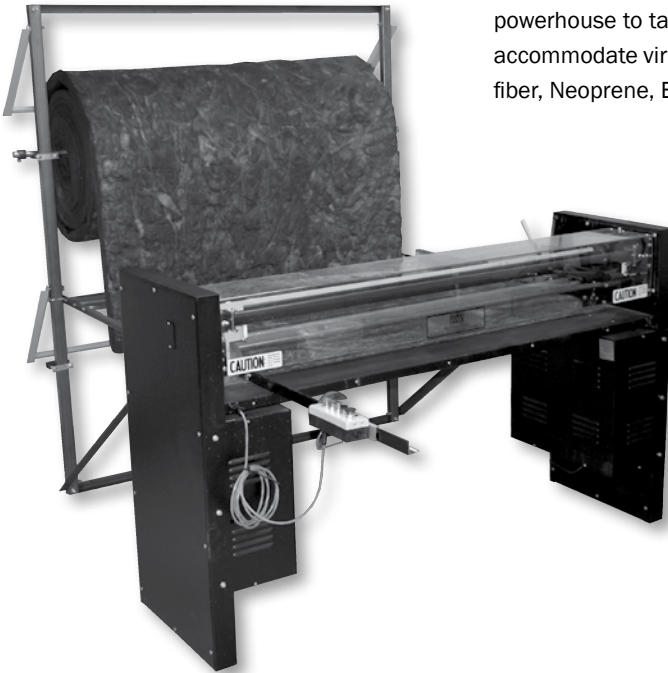

**Features:**

- Durable pulley driven cross cut blade for cutting to length.
- 1 gear driven slitter for cutting various widths. (4 can be added for additional cost).
- An insulation rack is designed to keep liner square and hold up to 2 rolls standard - an additional assembly is also available that can accommodate another 2 rolls.
- Micro switch interlocks on all guards for safety.
- Reliable pneumatic controls.
- Proven 24-volt components for all control circuits.
- Drive rollers of the PLSU2 also run in reverse for easier material loading/unloading.
- Portable controls allow for one machine to work for both 'Left to Right' and 'Right to Left' flows. The PLSU2 can also be manually operated if desired in addition to automatic operation.
- The PLSU2 is built to maintain a tolerance of + or - 1/4" of length desired as well as slitting accurately to desired widths.

Item#	Code	Description
39021	PLSU2	Universal Power Liner Sizer

## LSU LINER SIZER FOR USE WITH 1/2 IN. TO 2 IN. LINER



The LSU Advance Liner Sizer will help size and cut duct liner more efficiently than ever thought possible with a hand operated machine. It's enhanced features, make it possible to cut cotton fiber insulations, filter media, rubberized products and other unusual materials. The cross cut and slitter blades are mechanically gear driven to spin while cutting. This spinning action shears the material to create precise cuts in the most difficult of substances.

Item#	Code	Description
28076	LSU	Advanced 5ft. Insulation Cutter w/ 1 Slitting Assembly



# PORTABLE PINSPOTTER MACHINES

## CCD 110N COMPACT PINSPOTTER FOR USE WITH 1/2 IN. - 4 IN. WELD PINS



The CCD110N, Capacitor Discharge Welder, is designed for the convenience and comfort of the operator. It is powered by a 110 volt power source so it is ideal for smaller shops and light industrial applications. It will weld pins from 1/2" to 4" long onto steel from 26 to 20 gauge. The CCD110N is a smart choice for portable insulation applications. The CCD110N also features a weld capacity of up to 1/4" steel and stainless steel for enhanced versatility.

Item#	Code	Description
27122	CCD110N	Compact Capacitor Discharge Pinspotter 110V

## MF-70 PLATINUM EDITION COMPACT PORTABLE PINSPOTTER FOR USE WITH 1/2 IN. - 4 IN. WELD PINS



The MF70 has been developed from over 30 years of portable pinspotter history at Duro Dyne. The specially designed welding transformers allow it to deliver precisely timed welding to the gun tip, with more power than previous models. The MF70 has a compact design for easy handling, fitting anywhere in a shop. The MF70 will weld pins from 1/2 inch to 4 inches long on steel from 26 to 16 gauge. Proven solid-state weld control circuitry guarantees years of reliable, trouble-free service in your shop. Input voltage: 208-230 V 60 HZ single phase. 60 amp service.

Item#	Code	Description
27180	MF70	Platinum Edition Variable Capacity Compact Portable Pinspotter

Scan to watch  
a video



## PBF-70 HEAVY DUTY PINSPOTTER FOR USE WITH 1/2 IN. TO 4 IN. WELD PINS



The PBF70 Portable Pinspotter features a multi-tap transformer, allowing it to deliver precise, timed, low voltage to the welding tip for precision welds. This machine will weld pins from 1/2 inch to 4 inches long on steel from 26 to 16 gauge. A new, innovative, ergonomic, high impact gun allows more flexibility during operation. Proven solid-state weld control circuitry guarantees years of reliable, trouble-free service in your shop.

- Heavy-duty caster wheels allow easy movement in the shop
- Hi/Lo power selection via two weld cable power ports provides adjustment for different welding conditions
- Standard 16 foot gun cable and 11 foot ground cable.
- Gun Cable is extendable to 24 feet with optional extension set (Item # 27054)
- Ergonomic, high impact weld gun allows more flexibility
- "Easy Read" weld timer adjustment for precise control
- Panel mounted test switch and indicator lights for easy troubleshooting
- Proven Solid State Control Circuitry

Item#	Code	Description
27187	PBF70	Platinum Edition Hi-Capacity Portable Pinspotter

Scan to watch  
a video



# PINSPOTTER MACHINES

## FPP70 PLATINUM EDITION

### PINSPOTTER

\*MF70/MF12A  
sold  
separately



The FPP70 works in conjunction with the Duro Dyne MF70/MF12A compact pinspotters (sold separately). The FPP70 is fully assembled for pneumatic and electronic controls to allow the MF70/MF12A welding source to be utilized as both a hand held pinspotters and a fixed head pinspotters. This provides the customer with greater capabilities at a lower cost. The MF70/MF12A when used with the FPP70, will weld pins from 1/2 inch to 2 inches long on 26 to 20 gauge.

- Increased Speed 2-3x faster!
- Automatic Pin Feed
- Vibrator bowl with 1,000 - 1" pin capacity
- Capable of bulk feeding and welding 2" pins with 2" liner
- Feed Track sensor to ensure a full track of pins
- Dwell timer for a more consistent weld
- Foot Pedal for hands free operation
- Front mounted Air Regulator Assembly for easier accessibility
- 5 foot throat
- Please note: The FPP70 is powered by the MF70/MF12A and will not function without the MF70/MF12A

Scan to watch  
a video



Item#	Code	Description
27181	FPP70	Platinum Edition Automatic Bulk Feed 4ft Conversion Platform

## FG MACH70 PLATINUM EDITION AUTOMATIC BULK FEED PINSPOTTER WITH FIVE FOOT THROAT



The FG Mach70 Pinspotters was designed utilizing the best of current technologies to provide greater power and reliability for insulation fastening. The inherent minimal material handling and the use of welded pins will insure your shop a cost efficient, quality product. Our FG Mach70 machine is capable of welding pins up to 4" to address the higher R-value insulation now being specified throughout the industry. Will weld the full range of Duro Dyne pins on galvanized metal up to 18 gauge.

- Manual loading track for 3" & 4" pins
- Heavy duty vibrator bowl pins for up to 2"
- Redesigned single transformer for a wider range of welding capabilities
- Wider mouth design for welding up to 4" pins on 4" liner
- Floating upper weld tip assembly for weld cable & weld tip longevity
- Optional lift kit available
- Will weld pins from 1/2"-2" on 16-28 gauge; weld performance for pins longer than 2" may vary dependent upon voltage, amperage and cable length.

Item#	Code	Description
27184	FG MACH70	Platinum Edition Wide Mouth, High Cap. Bulk Feed Auto Pinspotters

## RH MACH70 PLATINUM EDITION ROLLING HEAD AUTOMATIC PINSPOTTER




The RH Mach70 Pinspotters features a more efficient transformer that provides a wider range of welding capabilities. The Heavy Duty Vibrator Bowl and base weld pins up to 2", and the optional manual feed accommodates pins up to 4" on 4" insulation. A floating upper weld tip and an optional lift kit are among some of the improvements to this Pinspotters. The RH Mach70 also features a notch on the support bar to easily accommodate TDC/TDF duct. The ability to move the trolley instead of the ductwork minimizes material handling. An auxiliary gun & ground cable box has been added to offer the ability to convert this machine to a handheld pinspotters (10ft gun & ground cable sold separately).

- Manual loading track for 3" & 4" pins
- Heavy duty vibrator bowl pins for up to 2"
- Redesigned single transformer for wider range of welding capabilities
- Wider mouth design for welding up to 4" pins on 4" liner
- Floating upper weld tip assembly for weld cable & weld tip longevity
- TDC/TDF notch
- Optional lift kit available
- Will weld pins from 1/2"-2" on 16-28 gauge; weld performance for pins longer than 2" may vary dependent upon voltage, amperage and cable length.

Item#	Code	Description
27182	RH MACH70	Platinum Edition Rolling Head Pinspotters TDC/TDF Notch Comes Standard On All Units

# PINSPOTTER MACHINES

## HIGH SPEED MULTIHEAD PINSPOTTER

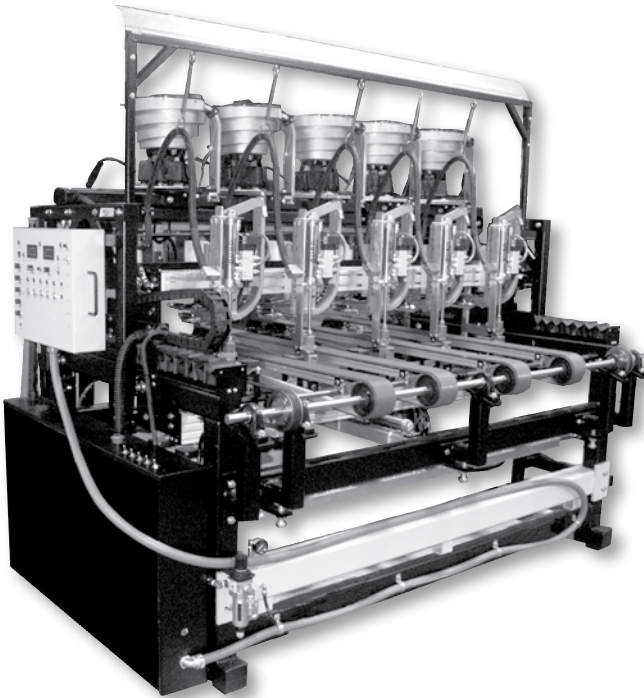


Trouble free service has always been the foundation on which all Duro Dyne Pinspotters are built. All components are designed for easy access for maintenance and service bringing even higher levels of reliability, serviceability and efficiency.

- Full production capacity from ½ inch pins on light gauge material all the way up to 10 foot sheets of 16 gauge material pinned with 2 inch pins at 6 inch centers at 50 feet per minute.
- Newly designed pin feed system accommodating ½ inch to 2-¼ inch pins with no change of bowls required.
- Open Air design that allows operator a full view of material as it passes through the line.
- Ambidextrous Control Console with Umbilical cord allows operation from either side of fabrication line, to accommodate L to R and R to L work flow.
- Non-slip belts & magnetic hold downs to insure positive ground and stability during the weld cycle.
- Fold up gantry to allow easy replenishment of pins.
- Monitor pin level from the floor with the high mount mirror system
- Will weld pins from ½”-2” on 16-28 gauge.

Item#	Code	Description
39071	HSMH6	6-Head Unit
39072	HSMH5	5-Head Unit

## MULTIHEAD PINSPOTTER

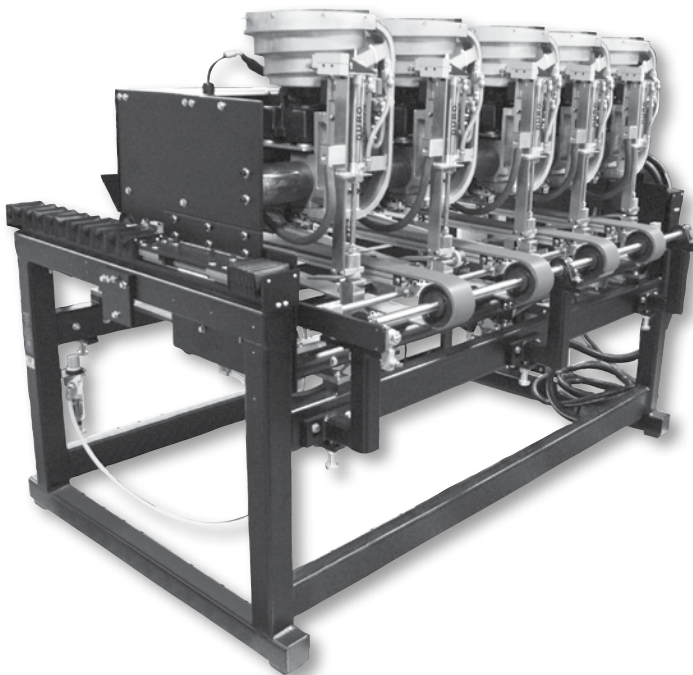


The FGMH Multihead Pinspotter from Duro Dyne will provide maximum fastening quality with minimum maintenance. It is backed with Duro Dyne's 40+ years of pinspotting experience. The Floating carriage design of the FGMH eliminates the need for stopping the material for installation of fasteners and ensures speeds of 40 ft per minute. All Solid state components are easily reachable through simple access panels.

- Will weld pins from ½”-2” on 16-28 gauge.

Item#	Code	Description
39073	FGMH6	6-Head Unit
39074	FGMH5	5-Head Unit

**Please Visit Our Website  
[www.durodyne.com](http://www.durodyne.com)  
for the most current product information.**

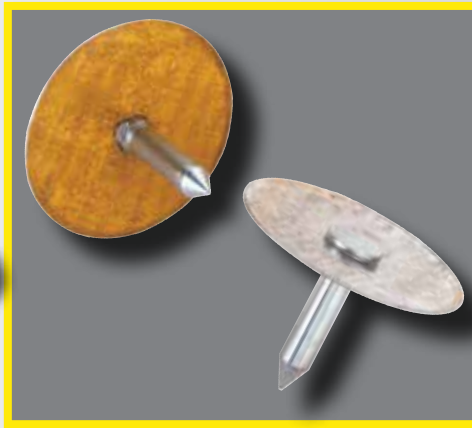

**Duro Dyne Corporate Headquarters, Bay Shore, NY  
631-249-9000 • Fax: 631-249-8346  
Duro Dyne Midwest • Duro Dyne West • Duro Dyne Canada  
[www.durodyne.com](http://www.durodyne.com) • E-mail: [durodyne@durodyne.com](mailto:durodyne@durodyne.com)**

**DURO  
DYNE**

7/6/2023  
BB026403