

Supco[®]

2025

HEATING PRESEASON

FEATURING NEW PRODUCTS FROM:

Supco[®]

TRADEFox[®]

TABLE OF CONTENTS

IGNITERS	3-4	<i>NEW ITEMS!</i>
FLAME SENSORS & THERMOCOUPLES	5	
COMMERCIAL REFRIGERATION	6-7	<i>NEW ITEMS!</i>
GAS CONNECTORS & VALVES	8	
CONTROLS	9-14	<i>NEW ITEMS!</i>
SCREWS & POOKIE BUSTER FLIP	15	<i>NEW ITEMS!</i>
MOTORS & MOTOR ACCESSORIES	16	<i>NEW ITEMS!</i>
INDOOR AIR QUALITY	17	
V-BELTS & RESTRING KITS	18	
YEAR ROUND NECESSITIES	19	
DEFROST TIMERS	20	
INDUSTRIAL BRUSHES	21	
TRADEFOX® TECHNICIAN-INVENTED PRODUCTS	22-29	<i>NEW ITEMS!</i>
DURO DYNE® - DYNATITE®	30	<i>NEW ITEMS!</i>
DURO-LINE™ STEEL LINE SETS	31	<i>NEW ITEMS!</i>
SUPCO® LINEBACKER®	32-39	<i>NEW ITEMS!</i>
SOLDERWELD® BRAZING & SOLDERING	40-41	<i>NEW ITEMS!</i>
PIPE VISE™ PREMIUM PIPE TOOLS	42	<i>NEW ITEMS!</i>
SB1® PUSH-TO-CONNECT REFRIGERANT FITTINGS	43	

WHEN THE HEAT IS ON, CHOOSE SUPCO® DIRECT REPLACEMENT FLAT & ROUND IGNITERS.

EXACT REPLACEMENT IGNITERS

<p>S0230K00000S</p>  <p>Can Replace: Goodman® 0230K00000S</p>	<p>S903758</p>  <p>Can Replace: Nordyne® 903758</p>	<p>SSN24</p>  <p>Can Replace: Honeywell® Q3400A1024</p>	<p>SPLT3400</p>  <p>Can Replace: Lochinvar® PLT3400</p>	<p>SKIT03033</p>  <p>Can Replace: Trane® KIT03033</p>
<p>SSN21</p>  <p>Can Replace: Lennox® 75M21</p>	<p>SSN2901</p>  <p>Can Replace: Lennox® 80M29</p>	<p>SSN2533</p>  <p>Can Replace: ICP® 1172533</p>	<p>SSN0145</p>  <p>Can Replace: Trane® IGN00145 & IGN-0145</p>	<p>SIG6692</p>  <p>Can Replace: Rheem® 62-2266-92</p>
<p>SSN081KS</p>  <p>Can Replace: Lennox® LB-112237B, 70W16</p>	<p>SSN082KS</p>  <p>Can Replace: Carrier® LH33ZG001</p>	<p>SSN083KS</p>  <p>Can Replace: Carrier® S1-025-49808-000, S1-025-45231-000</p>	<p>SSN084KS</p>  <p>Can Replace: White Rodgers® 789-707A1</p>	<p>SSN085KS</p>  <p>Can Replace: White Rodgers® 789A-751KT1</p>
<p>SSN086KS</p>  <p>Can Replace: White Rodgers® 789A-751KT2</p>	<p>SSN087KS</p>  <p>Can Replace: White Rodgers® 789A-820KT1</p>	<p>SSN5703S</p>  <p>Can Replace: Goodman® 20135703S</p>	<p>SSN33421</p>  <p>Can Replace: York® 025-33421-000</p>	<p>SSN56W61</p>  <p>Can Replace: Lennox® 56W61</p>

ROUND SILICON CARBIDE IGNITERS

<p>SIG100</p>  <p>Can Replace: York® 25025-27774-000</p>	<p>SIG101</p>  <p>UNIVERSAL</p>	<p>SIG102</p>  <p>Can Replace: Nordyne® RH62286892</p>	<p>SIG104</p>  <p>Can Replace: Nordyne® 9031100</p>	<p>SIG106</p>  <p>Can Replace: Norton® 271B, 271J, 271N, 271Y</p>
<p>SIG107</p>  <p>Can Replace: Heil Quaker® 1009604</p>	<p>SIG108</p>  <p>Can Replace: Rheem® SP10972</p>	<p>SIG109</p>  <p>Can Replace: Gemline® IG109</p>		

References to original equipment and other manufacturers' names, models, trademarks and part numbers are used for identification purposes only and SUPCO® replacement products are not in any way affiliated, endorsed or sponsored by such manufacturers.

FLAT SILICON CARBIDE IGNITERS



Can Replace: Amana® 10041601, 41-401



Can Replace: Weil-McLane® 511-330-190, 41-404



Can Replace: Luxair Coleman® 025-27766-000, 41-405



Can Replace: Weil-McLane® 511-330-188, 41-406



Can Replace: Trane® B144676P02, 41-407



Can Replace: Rheem® 62-22868-92, Trane® B340039P01, 41-408



Can Replace: Carrier® LH33Z501A, 41-409



Can Replace: Trane® B144676P01, 41-410



Can Replace: Rheem® 62-22868-82, 41-411



Can Replace: Goodman® B1401009, ICP® 1009604, 41-412



Can Replace: Comfortmaker/Tempstar® 1096048, 41-414



Can Replace: Goodman® B1401018S, 41-418



CROSS REFERENCE ON OUR APP
Find the right Supco® igniter match on the free Supco® Techlink™ App. Available for iOS® and Android®



SCAN QR TO DOWNLOAD
IGNITER CROSS REFERENCE BROCHURE

UNIVERSAL SILICON CARBIDE IGNITER KITS



Can Replace: 41-402, 41-403, 41-404, 41-405, 41-407, 41-408, 41-409, 41-410, 41-412, 41-414, 41-1090, 41-238, 41-242



Can Replace: 41-402, 41-408, 41-410, 41-411



Can Replace: 41-403, 41-404, 41-407, 41-409



UNIVERSAL

UNIVERSAL SILICON NITRIDE IGNITER KITS



Can Replace
Hundreds of OEMs



- Economic Design
- Faster Time to Temp
- Lower power consumption
- 1 year warranty



- Miniature Design
- Faster Time to Temp
- Lower power consumption
- 3 year warranty



- Robust Design
- Faster Time to Temp
- Lower power consumption
- 2 year warranty

References to original equipment and other manufacturers' names, models, trademarks and part numbers are used for identification purposes only and SUPCO® replacement products are not in any way affiliated, endorsed or sponsored by such manufacturers.



FLS010

Can Replace:
Goodman® 0130F00010



FLS013

Can Replace:
Carrier® LH33WZ514



FLS014

Can Replace:
Carrier® LH680534



FLS201

Can Replace:
Goodman® 10735201



FLS301

Can Replace:
Rheem® 62-25343-01



FLS401

Can Replace:
Mars® 67970



FLS700

Can Replace:
York® 025-27773-700



FLS52W29

Can Replace:
Lennox® 52W29



FLS51M14

Can Replace:
Lennox® 51M14


WATER HEATER IGNITER



Supco® P/N
SSN6005

- Can Replace: A.O.Smith® 9003626005

FURNACE PILOT BURNER ASSEMBLY

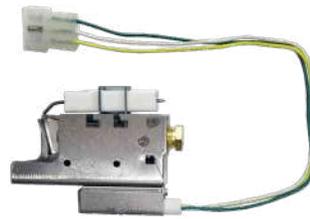

Supco® P/N
FLS0005

- Can Replace: Carrier® LH80005
- 740A Electronic Ignition switch with built-in safety

THERMOCOUPLES

SUPCO® P/N	Length	Can Replace
TH19848	48"	Robertshaw® 1980-48
TH19860	60"	Robertshaw® 1980-60
TH181975	39"	York® / Nordyne® 181975
TH181955	24"	Vanguard® 181955
TH198018	18"	Robertshaw® 1980-018
TH198024	24"	Robertshaw® 1980-024
TH198036	36"	Robertshaw® 1890-036



References to original equipment and other manufacturers' names, models, trademarks and part numbers are used for identification purposes only and SUPCO® replacement products are not in any way affiliated, endorsed or sponsored by such manufacturers.

NEW

TAP VALVES


For humidifier & evaporative cooler installations.

- Lead Free
- NSF Certified
- 1/4" OD compression brass ball valve won't leak or clog


SUPCO® P/N	Can Replace
TV78ODC	7/8" OD Compression Tap Valve
TV58ODC	5/8" OD Compression Tap Valve
TV34FSWT	3/4" Female Sweat Style Tap Valve
TV12FSWT	1/2" Female Sweat Style Tap Valve



TV78ODC

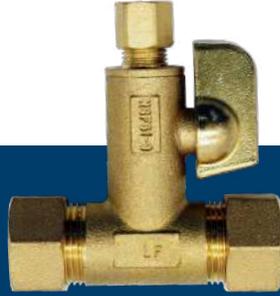

TV58ODC

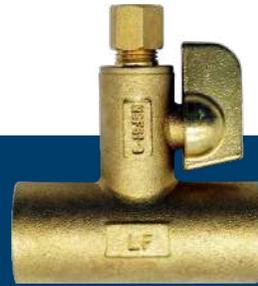

TV34FSWT




TV12FSWT

COMMERCIAL REFRIGERATION

UHS UNIVERSAL HUMIDIFIER SOLENOID VALVE REPLACEMENT KITS

- Each kit includes solenoid valve, mounting bracket and all fittings to remove and replace the existing solenoid valve
- Easy "wrench-in" installation
- Adjustable water flow valve
- Economically priced compared to OEM versions

SUPCO® P/N	Volts	Can Replace
SUHS24	24V	Aprilaire® 4040, General® 990-53, Honeywell® 320016939-002, Skuttle® A01-0814-148
UHS120	120V	Aprilaire® 4005, General® 990-52

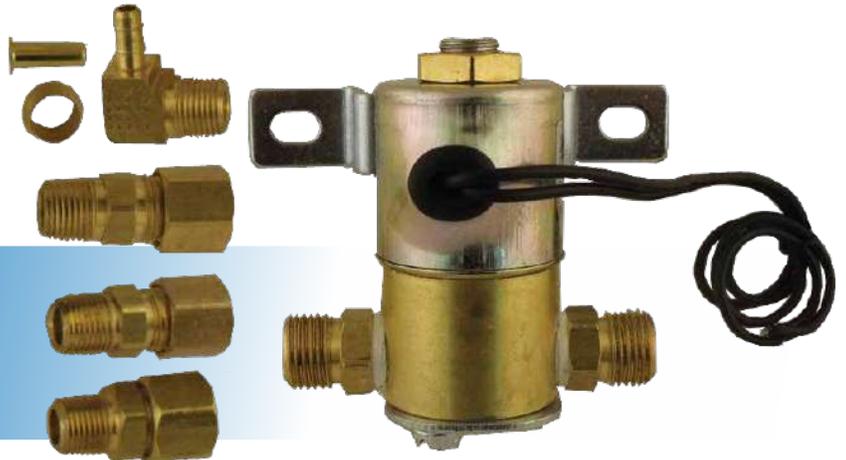

REPLACES 99% OF ALL HUMIDIFIER SOLENOIDS IN THE FIELD

NEW

DUAL VOLTAGE CONDENSATE TANK PUMP



- Dual voltage - 110V to 240V
- Mold resistant tank
- Hall effect water level sensor
- 24ft Water lift capability
- Water overflow safety switch with audible alarm
- Maximum water temperature 140°F/60°C
- Built in wall mounting tabs on the tank
- Quiet operation - < 50db(A) at 3 feet
- Includes 19ft discharge tube and thermostat safety switch wire

Supco® P/N	Volts
SPCP24U	110 - 240

CONDENSATE PUMPS

High quality pump designed to remove condensate from AC systems, condensing furnaces and boilers, ice machines, drinking fountains, and coolers. These pumps incorporate an audible alarm, and an overflow switch that can be used to shut down the system.


Supco® P/N	Volts
SPCP115	115
SPCP230	230

- ¼" quick connect terminals
- ⅜" rubber ball check valve
- 22 feet of standard lift @ 10 GPH
- 3 inlet holes
- 3 terminals provided for easy connection
- 6 foot power cord included
- Independent NC safety switch & motor switch
- Independent NO audible alarm switch rated @ 80 dB
- Metal side mount tabs, 11.5" on center
- Specially designed leak-free motor and safety float
- Suitable for acidic condensate
- Vibration absorbing feet

FILTER BOX GRABBER

Lifts filter boxes from ground to roof level quickly and safely.

- Compact, foldable design saves space in service truck
- Unique grab-and-pull system
- Can lift up to 20 pounds

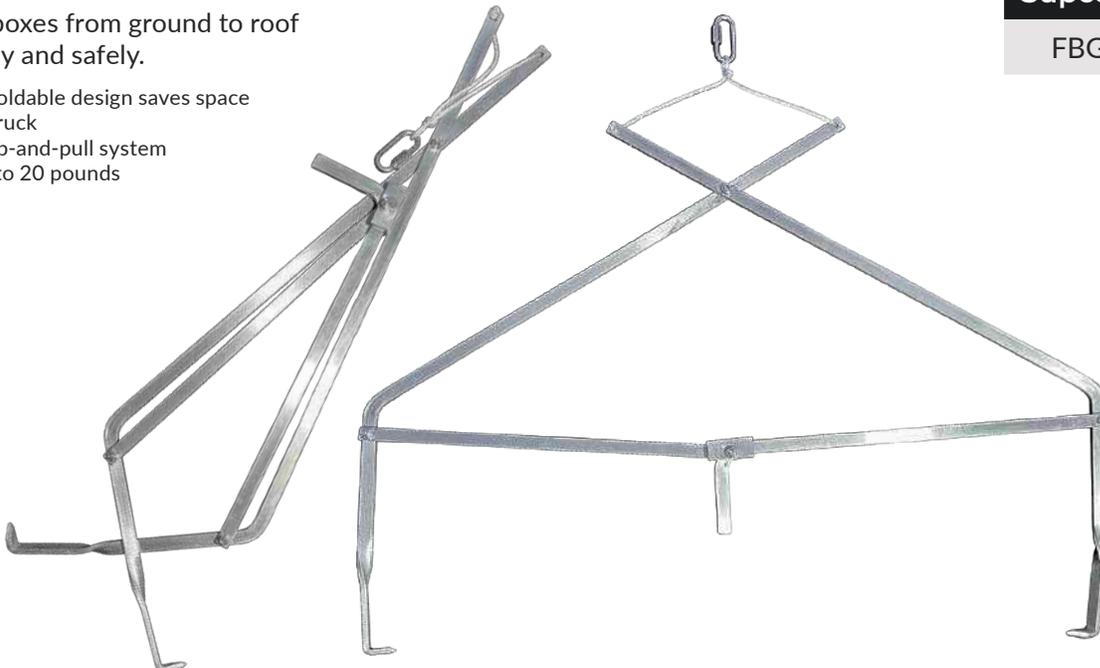

Supco® P/N
FBG100

COMMERCIAL REFRIGERATION



GAS CONNECTORS

SUPCO® P/N	Description
GC30C-3131-18	(COATED) SS GAS CONNECTOR 5/8" OD (1/2" ID) 1/2"MIP x 1/2" MIP
GC30C-3131-24	(COATED) SS GAS CONNECTOR 5/8" OD (1/2" ID) 1/2"MIP x 1/2" MIP
GC30C-3131-36	(COATED) SS GAS CONNECTOR 5/8" OD (1/2" ID) 1/2"MIP x 1/2" MIP
GC30C-3131-48	(COATED) SS GAS CONNECTOR 5/8" OD (1/2" ID) 1/2"MIP x 1/2" MIP
GC30C-3131-60	(COATED) SS GAS CONNECTOR 5/8" OD (1/2" ID) 1/2"MIP x 1/2" MIP
GC30C-3131-72	(COATED) SS GAS CONNECTOR 5/8" OD (1/2" ID) 1/2"MIP x 1/2" MIP
GC30C-3132-36	(COATED) SS GAS CONNECTOR 5/8" OD (1/2" ID) 1/2"FIP x 1/2" MIP
GC30C-3132-48	(COATED) SS GAS CONNECTOR 5/8" OD (1/2" ID) 1/2"FIP x 1/2" MIP
GC30C-3132-60	(COATED) SS GAS CONNECTOR 5/8" OD (1/2" ID) 1/2"FIP x 1/2" MIP
GC30C-3132-72	(COATED) SS GAS CONNECTOR 5/8" OD (1/2" ID) 1/2"FIP x 1/2" MIP
GC30C-3141-36	(COATED) SS GAS CONNECTOR 5/8" OD (1/2" ID) 1/2"MIP x 3/4" MIP
GC30C-3141-48	(COATED) SS GAS CONNECTOR 5/8" OD (1/2" ID) 1/2"MIP x 3/4" MIP
GC30C-3141-60	(COATED) SS GAS CONNECTOR 5/8" OD (1/2" ID) 1/2"MIP x 3/4" MIP
GC30C-3141-72	(COATED) SS GAS CONNECTOR 5/8" OD (1/2" ID) 1/2"MIP x 3/4" MIP
GC30C-3142-48	(COATED) SS GAS CONNECTOR 5/8" OD (1/2" ID) 3/4"FIP x 1/2" MIP
GC30C-4142-48	(COATED) SS GAS CONNECTOR 5/8" OD (1/2" ID) 3/4"FIP x 3/4" MIP
GC30C-4142-60	(COATED) SS GAS CONNECTOR 5/8" OD (1/2" ID) 3/4"FIP x 3/4" MIP
GC30C-4142-72	(COATED) SS GAS CONNECTOR 5/8" OD (1/2" ID) 3/4"FIP x 3/4" MIP
GC30C-4242-36	(COATED) SS GAS CONNECTOR 5/8" OD (1/2" ID) 3/4"FIP x 3/4" FIP
GC10-3131-36	SS GAS CONNECTOR 3/8" OD 1/2" MIP x 1/2" MIP
GC10-3131-48	SS GAS CONNECTOR 3/8" OD 1/2" MIP x 1/2" MIP
GC10-3131-60	SS GAS CONNECTOR 3/8" OD 1/2" MIP x 1/2" MIP
GC10-3132-36	SS GAS CONNECTOR 3/8" OD 1/2" FIP x 1/2" MIP
GC10-3132-48	SS GAS CONNECTOR 3/8" OD 1/2" FIP x 1/2" MIP
GC10-3132-60	SS GAS CONNECTOR 3/8" OD 1/2" FIP x 1/2" MIP
GC10C-3131-36	(COATED) SS GAS CONNECTOR 3/8" OD 1/2" MIP x 1/2" MIP
GC10C-3131-48	(COATED) SS GAS CONNECTOR 3/8" OD 1/2" MIP x 1/2" MIP
GC10C-3131-60	(COATED) SS GAS CONNECTOR 3/8" OD 1/2" MIP x 1/2" MIP
GC20-3131-36	SS GAS CONNECTOR 1/2" OD 1/2" MIP x 1/2" MIP
GC20-3131-48	SS GAS CONNECTOR 1/2" OD 1/2" MIP x 1/2" MIP
GC20-3131-60	SS GAS CONNECTOR 1/2" OD 1/2" MIP x 1/2" MIP
GC20-3132-36	SS GAS CONNECTOR 1/2" OD 1/2" FIP x 1/2" MIP
GC20-3132-48	SS GAS CONNECTOR 1/2" OD 1/2" FIP x 1/2" MIP
GC20-3132-60	SS GAS CONNECTOR 1/2" OD 1/2" FIP x 1/2" MIP
GC20C-3131-36	(COATED) SS GAS CONNECTOR 1/2" OD 1/2" MIP x 1/2" MIP
GC20C-3131-48	(COATED) SS GAS CONNECTOR 1/2" OD (3/8" ID) 1/2" MIP x 1/2" MIP
GC20C-3131-60	(COATED) SS GAS CONNECTOR 1/2" OD 1/2" MIP x 1/2" MIP
GC20C-3131-72	(COATED) SS GAS CONNECTOR 1/2" OD (3/8" ID) 1/2" MIP x 1/2" MIP
GC20C-3132-24	(COATED) SS GAS CONNECTOR 1/2" OD (3/8" ID) 1/2"FIP x 1/2" MIP
GC20C-3132-48	(COATED) SS GAS CONNECTOR 1/2" OD (3/8" ID) 1/2"FIP x 1/2" MIP
GC20C-3132-60	(COATED) SS GAS CONNECTOR 1/2" OD (3/8" ID) 1/2"FIP x 1/2" MIP
GC20C-3132-72	(COATED) SS GAS CONNECTOR 1/2" OD (3/8" ID) 1/2"FIP x 1/2" MIP

GAS VALVES



- 3/4" FPT x 3/4" FPT STRAIGHT
- Dormont® Gas Ball Valve
- Compatible for inline gas (LP and natural gas) lines
- Quarter turn lever handle for quick valve shut-off
- Compact design for installation in restricted spaces
- Quality brass construction is durable and corrosion-resistant
- Certified to adhere to the CSA gas standards for safety

Supco® P/N	Dimensions	Can Replace
SGV441	1/2" FPT x 1/2" FPT STRAIGHT	640441
SGV446	3/4" FPT x 3/4" FPT STRAIGHT	640446



HIGH PRESSURE OPEN ON PRESSURE RISE

Supco® P/N	Open PSI (Cut Out)	Close PSI (Cut In)	Tolerance +/- PSI	Mars®	Johnson Controls®	Ranco®	Robertshaw®	R410A Application
SHP250150	250	150	15	33354/43322	N/A	N/A	N/A	
SHP250180	250	180	15		N/A	N/A	N/A	
SHP275195	275	195	15	33310/43324	P100CC9C	MPH7102	3100-112	
SHP300200	300	200	15	33355/43325	N/A	MPH7103	N/A	
SHP325225	325	225	15	43326	N/A	MPH7104	N/A	
SHP325230	325	230	15	33313	N/A	N/A	N/A	
SHP350250	350	250	15	33356/33316/ 43327	N/A	MPH71053101201/ 3100150		
SHP375265	375	265	15	33319/43328	N/A	MPH7106	3100111	
SHP400200	400	200	15	33357/43329	N/A	N/A	3100152	
SHP400280	400	280	15	33322/43330	N/A	N/A	N/A	
SHP400300	400	300	15	33358/33370	P100CA1C/ P100CP1C	MPH7107	3101202/3100151/ MG21-112	
SHP425300	425	300	15	33325/43332	N/A	N/A	N/A	
SHP425325	425	325	15	43333	P100CA2C/ P100CP2C	MPH7108	3100100/3100203/ MG211046	
SHP450250	450	250	15	33359/43334	N/A	N/A	N/A	
SHP480380	480	380	15	N/A	N/A	N/A	N/A	X
SHP550450	550	450	15	N/A	P100CE11D	N/A	N/A	X
SHP600475	600	475	15	33361/43335	N/A	N/A	N/A	X
SHP610420	610	420	15	43366/43376	N/A	N/A	N/A	X
SHP665565	665	565	15	N/A	P100CP85D	N/A	N/A	X
SLP90120	90	120	5	43375	N/A	N/A	N/A	X



MANUAL HIGH PRESSURE OPEN ON PRESSURE RISE

Supco® P/N	Open PSI (Cut Out)	Close PSI (Cut In)	Tolerance +/- PSI	Mars®	Johnson Controls®	Ranco®	Robertshaw®	R410A Application
SMR375	375	Manual	15	43312	P100DC3C	MPH7109	N/A	
SMR410	410	Manual	15	33365/43313	P100DA1C	MPH7110	3101301/3100103	
SMR440	440	Manual	15	33352/43315	N/A	N/A	3100104	
SMR575	575	Manual	15	43368	P100DA86D	N/A	N/A	X
SMR610	610	Manual	15	43369	N/A	N/A	N/A	X
SMR630	630	Manual	15	N/A	P100DA81C/D	N/A	N/A	X

References to original equipment and other manufacturers' names, models, trademarks and part numbers are used for identification purposes only and SUPCO® replacement products are not in any way affiliated, endorsed or sponsored by such manufacturers.



LOW PRESSURE OPEN ON PRESSURE DROP

Supco® P/N	Open PSI (Cut Out)	Close PSI (Cut In)	Tolerance +/- PSI	Mars®	Johnson Controls®	Ranco®	Robertshaw®
SLP0520	5	20	5	33329	P100AC1C	MPL7001	3101001
SLP0530	5	30	5	43342	N/A	N/A	3100002/ MG201132
SLP1025	10	25	5	33330	P100AP201C	MPL7011	3100050
SLP1032	10	32	5	33330	P100AP201C	MPL7011	3100050
SLP1535	15	35	5	43371	P100AC2	MPL7002	3100001/ MG201026
SLP2045	20	45	5	43345	N/A	N/A	3100003/ MG201133
SLP2550	25	50	5	43372	N/A	MPL7012	MG212033
SLP2565	25	65	5	33336/43347	N/A	N/A	3101002
SLP2580	25	80	5	33363/43348	N/A	MPL7003	3101003/3100051
SLP2580	25	80	5	33363/43348	N/A	MPL7003	3101003/3100051
SLP3560	35	60	5	43349	N/A	MPL7004	3100004/ MG201593
SLP4560	45	60	5	43351	P100AP2C	MPL7005	N/A
SLP4080	40	80	5	33364/43350	N/A	MPL7014	3101005/3100052
SLP5090	50	90	5	33339/43374	N/A	N/A	N/A
SLP75100	75	100	5	33342/43353	N/A	N/A	N/A
SLP90120	90	120	5	43375	N/A	N/A	N/A



FAN CYCLE CLOSE ON PRESSURE RISE

Supco® P/N	Open PSI	Close PSI	Tolerance	Mars®	Johnson Controls®	Ranco®	Robertshaw®	R410A Application
SFC75120	75	120	15	43301	N/A	MPF7006	N/A	
SFC110170	110	170	15	43302	N/A	MPF7007	N/A	
SFC125265	125	265	15	33340/43303	N/A	N/A	N/A	
SFC210275	210	275	15	33341	N/A	MPF7009	3101101/3100079	
SFC150225	150	225	15	43304	P100AP3C	MPF7008	N/A	
SFC170250	170	250	15	N/A	P100AP4C	N/A	N/A	
SFC200240	200	240	15	N/A	N/A	N/A	3100080	
SFC200365	200	365	15	N/A	N/A	N/A	N/A	X
SFC300400	300	400	15	43307	N/A	MPF7010	N/A	X
SFC275350	275	350	15					X


References to original equipment and other manufacturers' names, models, trademarks and part numbers are used for identification purposes only and SUPCO® replacement products are not in any way affiliated, endorsed or sponsored by such manufacturers.



SEQUENCERS

SUPCO® P/N	Volt	Timing (seconds)		OEM
		On	Off	
Q101	24	1-20	40-110	Goodman® B1290906 Lennox® 12F20 & 58C9701 York® 525-37322-000
Q102	24	30-90	1-30	Carrier® 40CF680020
Q103	24	1-20	40-110	ICP® / Carrier® HN67QC005 ICP® / Carrier® HQ1056789
Q104	24	30-90	1-30	Goodman® BT1256504 York® 525-37325-000 ICP® / Carrier® HN67QC006
Q105	24	1-110	1-110	York® 525-37327-000
Q106	24	1-110	1-110	ICP® / Carrier® HN67QC008 ICP® / Carrier® P284-1313
Q107	24	1-160	1-160	York® 525-37328-000

SUPCO® P/N	Volt	Timing (seconds)		OEM
		On	Off	
Q108	24	1-25	65-115	Goodman® B13707-38 ICP® / Carrier® HN67GJ002
Q109	24	20-50	40-110	Janitrol® BT1256500
Q110	24	10-30	30-60	Weatherking® 4223115608
Q111	24	10-40 10-30	90-160 (M1-M2) 30-60 (M3-M4)	Weatherking® 4223115606
Q112	24	10-30 10-30 10-30	90-150 (M1-M2) 30-60 (M3-M4) 30-60 (M5-M6)	Weatherking® 4223115607
Q113	240	10-30	15-65	Klixon® 6000E4-40 Mars® 33265
Q115	24	1-60	1-45	Coleman® 3120A377
Q116	24	1-60	1-45	Coleman® 3110-354

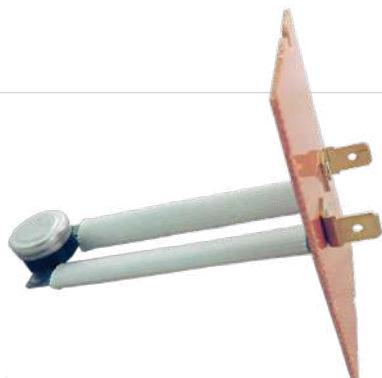

GAS FURNACE LIMIT THERMOSTATS

- Direct OEM replacements
- Compact, versatile and cost-effective

SUPCO® P/N	Description	Open °F	Close °F	Diff. °F
SHL501	L170-40 SPST	170°	130°	40°
SHL502	L180-30 SPST	180°	150°	30°
SHL503	L190-40 SPST	190°	150°	40°
SHL504	L240-40 SPST	240°	200°	40°
SHL505	L140-40 SPST	140°	100°	40°
SHL506	L170-40 SPST	170°	130°	40°
SHL507	L140-30 SPST	140°	110°	30°
SHL508	L150-20 SPST	150°	130°	20°
SHL509	L240-30 SPST	240°	210°	30°
SHL510	L150-20 SPST	150°	130°	20°
SHL511	L160-20 SPST	160°	140°	20°
SHL512	L170-20 SPST	170°	150°	20°

SUPCO® P/N	Description	Open °F	Close °F	Diff. °F
SHL513	L170-40 SPST	170°	130°	40°
SHL514	L180-40 SPST	180°	140°	40°
SHL515	L200-40 SPST	200°	160°	40°
SHL516	L210-40 SPST	210°	170°	40°
SHL517	L220-50 SPST	220°	170°	50°
SHL518	L250-40 SPST	250°	210°	40°
SHL519	L155-30 SPST	155°	125°	30°
SHL520	L100-20 SPST	100°	80°	20°
SHL522	L160-20 SPST	160°	140°	20°
SHL523	L130-20 SPST	130°	110°	20°
SHL524	L170-20 SPST	170°	150°	20°
SHL525	L180-20 SPST	180°	160°	20°

References to original equipment and other manufacturers' names, models, trademarks and part numbers are used for identification purposes only and SUPCO® replacement products are not in any way affiliated, endorsed or sponsored by such manufacturers.

NEW EZS SERIES - ADJUSTABLE AIR PRESSURE SWITCHES

The EZS is a field adjustable universal air pressure switch that can be applied to residential and commercial HVAC applications, commercial kitchen equipment (such as hoods and fryers), outdoor radiant heating products, pool and spa heating systems, and a variety of other applications.

The switch can sense positive, negative or differential air pressure. It contains a sensing diaphragm and integral snap-acting switch with three male 90° quick-connect spade terminals. The set point is field adjustable within its set point range.

SUPCO® P/N Pressure Range (W.C.)

EZS-492-09	0.08" wc to 1.0" wc
EZS-495-11	0.15" wc to 2.0" wc
EZS-498-13	2.0" wc to 10.0" wc



SET POINT ADJUSTMENT

Calibration requires no tools other than an Allen wrench.

AIR SAMPLING CONNECTION

Two integral sample line connectors, located on the high and low sides of the diaphragm, accept 3/16" ID flexible tubing. The high or positive inlet (P1) is black, and the low or negative inlet (P2) is gray. Connect the sample lines as follows:

POSITIVE PRESSURE ONLY:

Connect the sample line to P1; P2 remains open to the atmosphere.

NEGATIVE PRESSURE ONLY:

Connect the sample line to P2; P1 remains open to the atmosphere.

TWO NEGATIVE SAMPLES:

Connect higher negative sample to P2; lower sample to P1.

TWO POSITIVE SAMPLES:

Connect higher positive sample to P1; lower sample to P2.

ONE POSITIVE & ONE NEGATIVE:

Connect positive sample

UNIVERSAL AIR PRESSURE SWITCH

- Senses positive, negative or differential pressures
- Hardware kit included
- Set point range: 0.10" to 10.0" W.C.

Supco® P/N

NS2000031

REPLACES HUNDREDS OF SMALL FOOTPRINT AIR SWITCHES



ADJUSTABLE AIR PRESSURE SWITCH



Supco® P/N

AFS222121

Can Replace: White Rogers® 770-1

- Adjustable air pressure sensing switch
- Senses positive, negative or differential air pressure
- Set point range: 0.05" to 12.0" W.C.
- SPDT switch

CONTROLS - AIR PRESSURE SWITCH KITS



IAQ FAN CYCLE TIMER

- Button selection for FAN ON cycle time in increments of 10, 20, 30 or 40 minutes per hour
- LEDs indicate when fan is running or in off-cycle
- Monitors the FAN ON green wire from the thermostat and runs the selected On/Off cycle as long as the thermostat does not call for heat/cool
- Provides a delay function when AC shuts off to prevent bringing excessive moisture from water condensation on the AC coil into the room

Supco® P/N

IAQ1040

NEW

LOCK BOX PRO

Key or Combination
Lock Thermostat Guard



- ✓ Can be opened with either built-in key or combination lock.
- ✓ Includes ring base, mounting screws, anchors and 2 keys.
- ✓ Strong, clear polycarbonate construction.
- ✓ Fits thermostats up to 7.25" W x 4.75" H x 2.25" D.

Supco® P/N

BTG-LBP



THERMOSTAT GUARDS

Supco® P/N	Dimensions	Supco® P/N	Dimensions
BTG-UN	7.3" x 5.25" x 1.8"	BTG-DK	4 ¼" x 7 ½" x 2 ½"
BTG-K	5 ¼" x 4 ¾" x 3"	BTG-UM	8 ¼" x 5 ¾" x 3 ½"
BTG-EK	3 ¾" x 3 ½" x 2 ½"	BTG-UWM	6 ¾" x 4 ½" x 3 ¼"
BTG-RK	6 ¾" x 3 ½" x 3"	BTG-54VL	6 ¼" x 4 ¼" x 3 ¼"
BTG-RWM	6 ¾" x 3 ½" x 3 ¼"	BTG-54VLW	6" x 3 ¾" x 3 ¾"
BTG-UK2	8 ¼" x 5 ¾" x 3 ½"		

CONTROLS - WALL THERMOSTATS

AFFORDABLE THERMOSTATS *DESIGNED WITH CONTRACTORS IN MIND.*

WALL THERMOSTATS

- 2 Heat / 2 Cool Heat Pump Systems
- System Powered w/ Battery Backup

MECHANICAL THERMOSTAT



Supco® P/N
43004A



Supco® P/N
43005A

- Heat / Cool
- Snap Action Switching
- Mercury Free

DIGITAL THERMOSTAT



Supco® P/N
43054

- Non-Programmable
- Filter Change Indicator
- Indiglo Backlight

5/2 DAY PROGRAMMABLE THERMOSTAT



Supco® P/N
43154

- Pre-Programmed
- 4 Periods Per Day
- Indiglo Backlight


SHM SERIES MANUAL RESET THERMOSTATS



- 3/4" bi-metal temperature controls
- Opens on rise

SUPCO® P/N	Open °F
SHM130	130
SHM160	160
SHM170	170
SHM180	180
SHM200	200
SHM290	290
SHM350	350

STC SERIES THERMAL CUTOUT

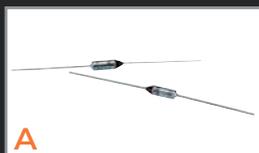

Open Temp

SUPCO® P/N	°C	°F	Style
STC4257	125	257	A
STC4283	139	283	A
STC4300	149	300	A
STC4333	167	333	A
STC4358	184	363	A
STC4438	226	438	A
STC4468	242	468	A
STC5257	125	257	B
STC5300	149	300	B
STC5333	167	333	B
STC5377	192	377	B
STC6257	125	257	C
STC6300	149	300	C
STC6333	167	333	C

THERMODISC

MANUAL RESET THERMOSTATS

- Auto reset
- 1/2" bi-metal temperature controls



SRL SERIES

SUPCO® P/N	Open °F	Close	SUPCO® P/N	Open °F	Close
SRL130	130	Manual	SRL250	250	Manual
SRL135	135	Manual	SRL260	260	Manual
SRL220	220	Manual	SRL300	300	Manual
SRL230	230	Manual	SRL350	350	Manual
SRL240	240	Manual			

SLS SERIES

SUPCO® P/N	Differential °F	Open °F	Close °F
SLS140	40	140	100
SLS150	40	150	110
SLS160	40	160	120
SLS170	40	170	130
SLS180	40	180	140
SLS200	40	200	160
SLS300	50	300	250

SHL SERIES LIMIT CONTROL THERMOSTATS

- Opens on rise
- Auto or manual reset
- 3/4" bi-metal temperature controls
- Can handle loads up to 25 amps at 240VAC



SUPCO® P/N	Differential °F	Open °F	Close °F
SHL120	10	120	110
SHL140	40	140	100
SHL150	40	150	110
SHL160	40	160	120
SHL170	40	170	130
SHL180	40	180	140
SHL190	40	190	150
SHL200	40	200	160
SHL230	40	230	190
SHL250	40	250	210

SHF SERIES FAN CONTROL THERMOSTATS

- Fan close on rise
- Auto or manual reset
- 3/4" bi-metal temperature controls
- Can handle loads up to 25 amps at 240VAC



SUPCO® P/N	Differential °F	Open °F	Close °F
SHF90	10	80	90
SHF110	20	90	110
SHF120	10	110	120
SHF140	20	120	140

AT SERIES ADJUSTABLE THERMOSTATS

- Open on rise
- 1/4" quick connect terminals
- Adjustable fan or limit operation



SUPCO® P/N	Differential °F	Adjustable Range °F
AT012	20	135 to 175
AT013	40	175 to 215
AT014	40	210 to 250
AT015	40	250 to 290
AT021	20	90 to 130
AT022	20	140 to 180

NEW SCREW JARS

- **STAY ORGANIZED** - No more scattered screws in your toolbox or van.
- **MULTIPLE SIZES & TYPES AVAILABLE** - Ideal for a variety of applications.
- **PERFECT FOR JOB SITE EFFICIENCY** - Grab, go, and get the job done faster.
- **DURABLE, RESEALABLE JARS** - Keeps screws secure, easy to store, and ready to use.

SELF-PIERCING TRI HEAD

SUPCO® P/N	Size	Screw Type	Head Type	MATERIAL	Qty
JTRIC7X1/2	7 X 1/2"	Self Piercing	TRI HEAD	Steel Zinc	100
JTRIQ7X1/2	7 X 1/2"	Self Piercing	TRI HEAD	Steel Zinc	250
JTRIF7X1/2	7 X 1/2"	Self Piercing	TRI HEAD	Steel Zinc	500
JTRIT7X1/2	7 X 1/2"	Self Piercing	TRI HEAD	Steel Zinc	1000
JTRIC8X1/2	8 X 1/2"	Self Piercing	TRI HEAD	Steel Zinc	100
JTRIQ8X1/2	8 X 1/2"	Self Piercing	TRI HEAD	Steel Zinc	250
JTRIF8X1/2	8 X 1/2"	Self Piercing	TRI HEAD	Steel Zinc	500
JTRIT8X1/2	8 X 1/2"	Self Piercing	TRI HEAD	Steel Zinc	1000
JTRIC8X3/4	8 X 3/4"	Self Piercing	TRI HEAD	Steel Zinc	100
JTRIQ8X3/4	8 X 3/4"	Self Piercing	TRI HEAD	Steel Zinc	250
JTRIF8X3/4	8 X 3/4"	Self Piercing	TRI HEAD	Steel Zinc	500
JTRIT8X3/4	8 X 3/4"	Self Piercing	TRI HEAD	Steel Zinc	1000
JTRIC8X1	8 X 1"	Self Piercing	TRI HEAD	Steel Zinc	100
JTRIQ8X1	8 X 1"	Self Piercing	TRI HEAD	Steel Zinc	250
JTRIF8X1	8 X 1"	Self Piercing	TRI HEAD	Steel Zinc	500
JTRIT8X1	8 X 1"	Self Piercing	TRI HEAD	Steel Zinc	1000
JTRIC8X1-1/2	8 X 1-1/2"	Self Piercing	TRI HEAD	Steel Zinc	100
JTRIQ8X1-1/2	8 X 1-1/2"	Self Piercing	TRI HEAD	Steel Zinc	250
JTRIF8X1-1/2	8 X 1-1/2"	Self Piercing	TRI HEAD	Steel Zinc	500
JTRIC8X2	8 X 2"	Self Piercing	TRI HEAD	Steel Zinc	100
JTRIQ8X2	8 X 2"	Self Piercing	TRI HEAD	Steel Zinc	250
JTRIF8X2	8 X 2"	Self Piercing	TRI HEAD	Steel Zinc	500
JTRIC8X2WHT	8 X 2"	Self Piercing	TRI HEAD	White	100
JTRIQ8X2WHT	8 X 2"	Self Piercing	TRI HEAD	White	250
JTRIF8X2WHT	8 X 2"	Self Piercing	TRI HEAD	White	500



SELF-DRILLING HEX HEAD

SUPCO® P/N	Size	Screw Type	Head Type	MATERIAL	Qty
JHEXC8X1/2	8 X 1/2"	Self Drilling	HEX HEAD	Steel Zinc	100
JHEXQ8X1/2	8 X 1/2"	Self Drilling	HEX HEAD	Steel Zinc	250
JHEXF8X1/2	8 X 1/2"	Self Drilling	HEX HEAD	Steel Zinc	500
JHEXT8X1/2	8 X 1/2"	Self Drilling	HEX HEAD	Steel Zinc	1000
JHEXC8X3/4	8 X 3/4"	Self Drilling	HEX HEAD	Steel Zinc	100
JHEXQ8X3/4	8 X 3/4"	Self Drilling	HEX HEAD	Steel Zinc	250
JHEXF8X3/4	8 X 3/4"	Self Drilling	HEX HEAD	Steel Zinc	500
JHEXT8X3/4	8 X 3/4"	Self Drilling	HEX HEAD	Steel Zinc	1000
JHEXC8X1	8 X 1"	Self Drilling	HEX HEAD	Steel Zinc	100
JHEXQ8X1	8 X 1"	Self Drilling	HEX HEAD	Steel Zinc	250
JHEXF8X1	8 X 1"	Self Drilling	HEX HEAD	Steel Zinc	500
JHEXT8X1	8 X 1"	Self Drilling	HEX HEAD	Steel Zinc	1000
JHEXC10X1/2	10 X 1/2"	Self Drilling	HEX HEAD	Steel Zinc	100
JHEXQ10X1/2	10 X 1/2"	Self Drilling	HEX HEAD	Steel Zinc	250
JHEXF10X1/2	10 X 1/2"	Self Drilling	HEX HEAD	Steel Zinc	500
JHEXT10X1/2	10 X 1/2"	Self Drilling	HEX HEAD	Steel Zinc	1000
JHEXC10X3/4	10 X 3/4"	Self Drilling	HEX HEAD	Steel Zinc	100
JHEXQ10X3/4	10 X 3/4"	Self Drilling	HEX HEAD	Steel Zinc	250
JHEXF10X3/4	10 X 3/4"	Self Drilling	HEX HEAD	Steel Zinc	500
JHEXT10X3/4	10 X 3/4"	Self Drilling	HEX HEAD	Steel Zinc	1000
JHEXC10X1	10 X 1"	Self Drilling	HEX HEAD	Steel Zinc	100
JHEXQ10X1	10 X 1"	Self Drilling	HEX HEAD	Steel Zinc	250
JHEXF10X1	10 X 1"	Self Drilling	HEX HEAD	Steel Zinc	500
JHEXT10X1	10 X 1"	Self Drilling	HEX HEAD	Steel Zinc	1000

SCREWS & POOKIE BUSTER FLIP

NEW POOKIE BUSTER FLIP

Patented Broach Cut
Magnetic Hex Nut Driver

SUPCO® P/N
PBF01-2PK

- Set includes two bits in four common sizes (1/4", 5/16", 3/8", and 7/16") to meet every job's needs.
- Patented broach cut end makes locating and removing fasteners covered in sealants a breeze.
- Easily cuts through soft and hardened mastics, caulking, and other materials.
- Made with high-quality materials to ensure long-lasting performance and reliability.





NEW FAN BLADE PULLER

Removes frozen fan blade-blower wheels from motor shafts.

- ✓ Accommodates 5/8" belt drive and 1/2" or less direct drive motor shafts
- ✓ Includes 4 pulling hooks, 3 set screws and 1 storage bag

- ✓ Made from sturdy, heavy duty steel
- ✓ Can be used to apply pushing or pulling force

Supco® P/N
FBP200

GENERAL PURPOSE MOTORS



- Shaded pole motor
- Open enclosure
- Single phase
- Rotation is determined by viewing the shaft end
- Motor has 4 studs on both ends

Supco® P/N	Can Replace
SM120	82120
SM121	82121

DRAFT INDUCER MOTOR



- M1 Combustion Blower Assembly
- Overload protection
- 120 VAC
- 60 Hz

Supco® P/N	Can Replace
SM3404	Nordyne® 903404 & More

DRAFT INDUCER MOTOR



- C-Frame
- Overload protection
- Single speed
- Cable with connectors and plastic fan blade included

Supco® P/N	Can Replace
SM4753	Carrier® HC21ZE117 & More

MOTOR MOUNT BRACKET KIT



- Used with 5.5" motors
- Grommets and eyelets included
- Designed for applications with 9" or 10" bolt circle diameters

Supco® P/N	Description
MB55	3 Leg
MB554	4 Leg

SM600 SERIES EXACT REPLACEMENT & UTILITY MOTOR KITS



SUPCO® P/N	Type	Volts AC	RPM	Shaft (in.)	Stack (in.)	Rotation (Reversible)
SM670	Sleeve	120	3000	3/16" x 1 1/4"	5/8"	CW/CCW
SM671	Sleeve	120	3000	3/16" x 1 1/4"	5/8"	CW/CCW
SM672	Sleeve	240	3000	3/16" x 1 1/4"	5/8"	CW/CCW
SM673	Sleeve	120	3000/1550	3/16" x 1 1/4"	5/8"	CW/CCW
SM675	Sleeve	120/240	3000	3/16" x 2 3/8"	1"	CW/CCW
SM690C	Sleeve	120	3000	3/16" x 1 1/4"	5/8"	CW/CCW

- SM675 is Thermal Protected
- Motor Kits Include Complete Hardware and Mounting Kits
- SM670, SM672, SM673 and SM690C Include Fan Blades FB402 and FB550
- SM675 Includes Fan Blade FB550 Only

FAN HOOD MOTORS



SUPCO® P/N	Volts	Speeds	RPM	Rotation	Shaft Diameter	Shaft Length
SM550	120	1	3000	CCW	7/32" Flat	1 3/4"
SM550P2*	120	1	3000	CCW	7/32" Flat	1 3/4"
SM551	120	2	3000/1640	CW	7/32" Flat	1 7/16"
SM552	120	1	3000	CCW	7/32" Flat	1 1/4"
SM553	120	1	3000	CCW	7/32" Flat	1 3/4"
SM554	120	2	3000/1500	CCW	7/32" Flat	1 7/16"
SM555	120	1	3000	CCW	7/32" Flat	2 3/8"

- *2 Pack
- Can Replace: Nutone® Range Hood Ventilators



WHEN IAQ IS CRUCIAL,
WE HAVE SOLUTIONS.



PCO

UUV-CBM-PCO
24VAC & 110 VAC

- ✓ 16" UV germicidal coil cleaner
- ✓ Improve energy efficiency
- ✓ Destroy mold & odors
- ✓ Various mounting scenarios
- ✓ Over/under voltage indicator
- ✓ LCD w/ real time status
- ✓ Countdown purifier animation
- ✓ Call-back indicator
- ✓ Photocatalytic Oxidation
- ✓ Captures volatile organic compounds



MASTER

UUV-CBM
24VAC & 110 VAC

- ✓ 16" UV germicidal coil cleaner
- ✓ Improve energy efficiency
- ✓ Destroy mold & odors
- ✓ Various mounting scenarios
- ✓ Over/under voltage indicator
- ✓ LCD w/ real time status
- ✓ Countdown purifier animation
- ✓ Call-back indicator
- Photocatalytic Oxidation
- Captures volatile organic compounds



ADVANCED

UUV-CBA
18-32V AC OR DC

- ✓ 16" UV germicidal coil cleaner
- ✓ Improve energy efficiency
- ✓ Destroy mold & odors
- ✓ Various mounting scenarios
- ✓ Over/under voltage indicator
- LCD w/ real time status
- Countdown purifier animation
- Call-back indicator
- Photocatalytic Oxidation
- Captures volatile organic compounds



**REPLACEMENT BULB
FOR ALL MODELS**

SUPCO® P/N: UUV-LP160T5

Will also replace other brands

LIFETIME BALLAST WARRANTY | 1-YEAR UV LAMP WARRANTY

INDOOR AIR QUALITY

Universal Solutions® Clear Blue® line of residential UV systems are distributed exclusively by SUPCO. These products are the smart answer to reduce bacteria, viruses and mold in the air and on the HVAC coil.

WE OFFER OVER 340 SKUS OF V-BELT TYPES

All belts clearly identify RMA classic part number and dimensionally equivalent FHP number.

See the full offering at supco.com, search keyword "Belt"



MULTI-PLUS DUAL BRAND V-BELTS

3L SECTION FHP V BELTS

- 3/8" top width
- 7/32" thick

A SECTION V BELTS

- 1/2" top width
- 11/32" thick
- Dual brand A & 4L

B SECTION V BELTS

- 21/32" top width
- 13/32" thick
- Dual brand B & 5L

V-BELTS & RESTRING KITS

COIL RESTRING KITS

Quality restrings for electric strip heater repair. Each kit contains one close-wound coil with terminal bolts attached, two sets of ceramic terminal bushings, four hex nuts, two lock and two flat washers. Coils fit ceramic insulators with 3/8" inside diameter openings.



SUPCO® Part No.	Coil O.D.	Stretch MAX./MIN.	Watts @ 240 Volts	Watts @ 277 Volts
KIT27200	3/8"	15"/51"	1501	2000

SUPCO® Part No.	Coil O.D.	Stretch MAX./MIN.	Watts @ 208 Volts	Watts @ 240 Volts
KIT24501	3/8"	34"/113"	3756	5000
KIT24300	3/8"	23"/76"	2253	3000
KIT24350	3/8"	28"/93"	2629	3500
KIT24400	3/8"	35"/117"	3004	4000
KIT24600	3/8"	49"/163"	4507	6000
KIT24500625	5/8"	17"/57"	3750	5000
KIT24500625-25	5/8"	17"/57"	3750	5000
KIT24500625-25S	5/8"	17"/57"	3750	5000

SUPCO® Part No.	Coil O.D.	Stretch MAX./MIN.	Watts @ 480 Volts
KIT48500	3/8"	38"/126"	5000
KIT48500625	5/8"	24"/78"	5000

SEASONAL STAPLES TO HAVE ON HAND



NEOPRENE AIR TUBING (BLACK)

SUPCO® P/N	Dimensions	Length
SNAT3165	3/16" I.D.	5 ft.
SNAT316100	3/16" I.D.	10 ft.
SNAT185	1/8" I.D.	5 ft.



PVC FLUE CAP

- Resistant to heat, cold, precipitation or UV radiation
- Protects furnace motor and interior from damaging moisture, debris and pests
- Precisely and quickly fits 1.5", 2" and 3" PVC pipe

Leak Lock® P/N

ECAP321



SILICONE RUBBER TUBING (RED) 5 FT. LENGTH

SUPCO® P/N	Dimensions	Wkg./Burst Pressure
SSRT185	1/8" I.D.	25/75 psi
SSRT3165	3/16" I.D.	20/60 psi
SSRT145	1/4" I.D.	5/15 psi



ENERGY SAVING PRODUCTS



N-take 2® Alternate Intake

- An alternate combustion inlet that prevents a blocked intake from shutting down the furnace
- For blocked intake on 2" and 3" PVC
- Installed in PVC Tee Fitting within the draft induction supply line in between the outdoor intake and furnace
- Not to be used as a primary combustion inlet

Supco® P/N

NT02

Easy Leveler Adjustable Furnace Legs

- Revolutionary furnace leveling system
- Four sturdy bolt adjusted leg extensions supplied with mounting materials.
- Simply turn the lag bolted insert clockwise or counterclockwise to raise or lower each corner of the unit
- Kit includes 4 leveler legs, and hardware



Supco® P/N

EL10



SUPCO® SYSTEM SAFE SEALANT

From the trusted manufacturer of Leak Lock®, SUPCO® System Safe Sealant will not cause system contamination, restrictions, fouling or failure.

- Supreme leak prevention for NPT, flares, Schrader cores & O-rings
- Formulated to work with all refrigerants and refrigeration lubricants
- Soft, pliable formula with a non stringy, mess-free application
- Compact, 1oz applicator tube with carabiner easily attaches to tool pouches
- Manufactured in the USA
- Sold in cases of 12



Supco® P/N

3S

CELLOTHERM™ HIGH TEMPERATURE FURNACE & RETORT CEMENT

- Seals doors and joints
- Bonds fire brick and combustion chambers
- Adheres to all surfaces
- Shrink and crack proof
- Lowest freeze storage



Supco® P/N

HS19114

Size

.5 gal.

TORK® DEFROST TIMERS



PART NO.	INPUT	CONTACTS
S804100	120VAC, 60HZ	1 N.O. / 2 N.C. CONTACTS
S804120	208-240VAC, 60HZ	1 N.O. / 2 N.C. CONTACTS
S804500	120VAC, 60HZ	1 N.O. / 1 N.C. CONTACTS
S804520	208-240VAC, 60HZ	1 N.O. / 1 N.C. CONTACTS
S814100	120VAC, 60HZ	1 N.O. / 2 N.C. CONTACTS
S814120	208-240VAC, 60HZ	1 N.O. / 2 N.C. CONTACTS
S814500	120VAC, 60HZ	1 N.O. / 1 N.C. CONTACTS
S814520	208-240VAC, 60HZ	1 N.O. / 1 N.C. CONTACTS
S814521	208-240VAC, 50HZ	1 N.O. / 1 N.C. CONTACTS

METAL CASE

24-HR

2 YEAR WARRANTY

INDOOR HEAVY DUTY STEEL CASE



Specifications

OPERATING VOLTAGES:	120 or 208/240 VAC, 60 Hz
CURRENT (AMPERAGE):	40 Amp non-inductive @ 120, 208 or 240 VAC
MAXIMUM HP:	2 hp @ 120, 208 or 240 VAC
PILOT DUTY:	690 VA @ 120, 208 or 240 VAC
OPERATING TEMPERATURE RANGE:	-35°F to +175°F (-37°C to +79°C)
OVERALL CASE DIMENSIONS:	7.697" H x 4.4" W x 3.8" D (19.6 cm H x 11.18 cm W x 9.66 cm D)
SHIPPING WEIGHT:	S8040 series 3.5 lbs (1.6 kgs) & S8141 series 3.75 lbs. (1.7 kgs)

AMPERAGE	HP	PILOT DUTY	OPERATING TEMPERATURE	CASE DIMENSIONS	DEFROST INIATION	DEFROST TERMINATION
40-amp non-inductive @ 120-240VAC	2HP @ 120-240VAC	690VA @ 120-240VAC	-35 °F to 175 °F (-37°C to 79°C)	7.7" H x 4.4" W x 3.8" D	Time	Time

M814520

Exact drop in replacement mechanism for TORK® S814520 & Paragon® 8145-20. Available in 6-pack display.



M814500

Exact drop in replacement mechanism for TORK® S814500, Paragon® 8145-00 & Precision® 6145-00

DEFROST TIMERS



WALK-IN COOLERS/FREEZERS



COMMERCIAL REFRIGERATION SYSTEMS



EVAPORATORS

TORK® TIME SWITCH

**120/208-277V,
16A LED/DEL**

APPLICATIONS INCLUDE:



Exhaust Fans



Electric Water Heaters



Pumps



Electric Motors



Commercial Lighting



Air Conditioning



Pool/Spa Equipment



Electric Signs



Water Features

1109A

METAL CASE

24-HR

2 YEAR WARRANTY



INDUSTRIAL BRUSHES

for HVAC and Refrigeration Installation and Service

This selection of general purpose and specialty brushes includes: Brushes for soldering and brazing preparation, cleaning boiler/furnace heat exchangers and burner assemblies, removing dust, dirt, and debris on condenser and evaporator coils for residential/commercial air conditioning and refrigeration equipment.

CONDENSER BRUSH



Supco® P/N	OAL	Pack QTY
BRS00408	30"	36

FURNACE BRUSH



Supco® P/N	OAL	Filament	Pack QTY
BRS76200	48"	Crimped Brass	6
BRS76210	48"	Stainless Steel	12
BRS76220	48"	Grey Tampico	12

CHIP BRUSH



Supco® P/N	OAL	Filament	Pack QTY
BRS67192	1"	White Natural Bristle	36
BRS67194	2"	White Natural Bristle	24
BRS67196	3"	White Natural Bristle	24

FITTING BRUSH



Supco® P/N	OAL	OD	ID	Pack QTY
BRS00924	5-3/4"	1/4"	1/8"	12
BRS00925	6-5/8"	3/8"	1/4"	12
BRS00926	6-5/8"	1/2"	3/8"	12
BRS00927	6-5/8"	5/8"	1/2"	12
BRS00928	6-5/8"	3/4"	5/8"	12
BRS00929	6-5/8"	7/8"	3/4"	12
BRS00931	6-5/8"	1-1/8"	1"	6
BRS00932	6-5/8"	1-3/8"	1-1/4"	6
BRS00934	6-5/8"	1-5/8"	1-1/2"	6
BRS00935	6-5/8"	2-1/8"	2"	6

2-IN-1 BRUSH



Supco® P/N	OD	ID	Pack QTY
BRS009951	1/4"	1/8"	48
BRS009955	3/8"	1/4"	48
BRS009956	1/2"	3/8"	48
BRS009953	5/8"	1/2"	48
BRS009954	3/4"	5/8"	48
BRS009952	7/8"	3/4"	48

FIN WISK BRUSH



Supco® P/N	OAL	Filament	Pack QTY
BRS02026	6-1/2"	Polyester	24

DOPE/ACID BRUSH



Supco® P/N	Description	OAL	Filament	Pack QTY
BRS10007	Dope/Acid Brush	7"	Horsehair	36
BRS10001	Acid Brush	6"	Horsehair	144*

*Sold per pack

SCRATCH BRUSH



Supco® P/N	OAL	Filament	Pack QTY
BRS81002	7-3/4"	Stainless Steel	36

INDUSTRIAL TUBE BRUSH



Supco® P/N	OAL	Filament	Pack QTY
BRS14518	15"	Nylon	12

BOILER BRUSH



Supco® P/N	OAL	Filament	Pack QTY
BRS46304	48"	Spring Grade Tempered Wire	12
BRS14477	30"	Natural Bristle	12
BRS14466	30"	Crimped Carbon Steel	12
BRS14468	46"	Crimped Carbon Steel	12

UTILITY WIRE BRUSH



Supco® P/N	OAL	Filament	Pack QTY
BRS81234	9.5"	Tempered Steel	12

TRADEFox® INVENTOR PROGRAM

Under the SUPCO TradeFox® Inventor Program, we work with technicians to bring their ideas to life and to the market through our years of experience in **engineering, manufacturing, marketing and national and global distribution.**

Visit SUPCOTRADEFox.COM to learn more.

TRADEFox® TECHNICIAN-INVENTED PRODUCTS



Supco® P/N

MUKIT

ADJUSTABLE MAGNETIC UMBRELLA KIT

- 60" wide
- Waterproof, UV-coated umbrella w/ durable and flexible fiberglass ribs
- Patented base swivels and locks
- Heavy-duty magnet attaches securely to any metal housing
- Includes NEW SUPCO TRADEFOX® Lanyard to secure the umbrella

SUPCO TRADEFOX® LANYARD NOW INCLUDED



JOSH COOLEY

SUPCO TRADEFOX® AND PRODUCT DEVELOPMENT MANAGER

Josh works directly with HVAC technician-inventors, who come to us through our Inventor Program, as well as with our engineering and manufacturing teams to add innovative new products under the SUPCO TradeFox® line. Josh understands technicians and the trade.

Not only does he have extensive hands-on experience in the HVACR field, having owned and operated a fifteen-truck HVAC Company in Phoenix and Nashville, but Josh is a SUPCO TradeFox® in his own right.

He is the inventor behind the SUPCO TradeFox® Magnetic Umbrella that so many Techs in our industry know and love. He has since invented the Fire Rated Magnetic Umbrella and accessories which allows other trades, such as line workers, the versatility to benefit from the patented adjustable umbrella system.

BRING MORE FLEXIBILITY TO YOUR SUPCO TRADEFOX[®] MAGNETIC UMBRELLA WITH THESE **ADD-ON ACCESSORIES.**



EXTENSION POLE FOR MAGNETIC UMBRELLA

- Adds 9" in height to umbrella (total height approx. 46")
- Easy installation - no tools required
- Attaches between umbrella and base
- Designed to use with MUKIT
- Intended to be used with MUKIT only when the umbrella is in vertical position

Supco[®] P/N
MUPOLE



SECURE CLAMP FOR MAGNETIC UMBRELLA

- Replaces magnetic base so umbrella can clamp to a variety of non-magnetic surfaces for more working flexibility
- Made from heavy-duty steel

Supco[®] P/N
MUCLAMP

NOW, EVEN MORE TRADE WORKERS CAN BENEFIT FROM THE VERSATILITY OF OUR **ADJUSTABLE UMBRELLA SYSTEM.**



FIRE-RATED ADJUSTABLE MAGNETIC UMBRELLA KIT

Designed with NFPA 701 fire-rated fabric for a wide variety of applications.

Supco[®] P/N
MUKIT-FR

KIT INCLUDES:



- 60" wide umbrella with NFPA 701 fire-rated fabric, fiberglass shaft and plastic ribs



- Patented, adjustable base swivels and locks
- Heavy-duty magnet to attach to any ferrous metal surface
- Lanyard to help secure umbrella



- Heavy-duty steel clamp

NEW JUMPER KING®

Multi-Jumper with Selector **2.0**

YOUR FAVORITE MULTI-JUMPER UPGRADED:

- NEW DURABLE ROCKER SWITCHES
- NOW INCLUDES 'L' SHAPED MAGNET TIPS
- NEW EASY-TO-SEE RED POPPER FUSE
- UPGRADED HOOK FOR VERTICAL HANGING
- UPGRADED JUMPER LEADS FOR DURABILITY
- NEW FRONT FACING LEAD PORTS FOR A MORE COMPACT UNIT



ROBERT KRAFT SUPCO TRADEFOX®

HVAC technician Robert Kraft wanted a safer way to start a unit, other than standard jumper wires, to minimize the risk of damaging a compressor. After many prototypes, he designed a versatile tool that can start the unit, bypass switches, and diagnose low voltage shorts with a 3 Amp pop-out fuse, and named it- rightly so, The Jumper King™.



Supco® P/N
TFXJK

TRADEFOX® TECHNICIAN-INVENTED PRODUCTS

UNIVERSAL PIPE LEVEL

This technician-invented clamp level takes the headache out of balancing levels on copper pipe or PVC. Just clamp it on and level up your HVAC and Plumbing game.

- Accurate and easy to level copper and PVC pipe sizes from 3/8" to 2"
- Clamp firmly attaches to the various pipe sizes for hands-free leveling
- Made from Durable ABS plastic that won't wear out quickly or become loose like typical pipe levels
- Easily clamps to your bag for quick access
- Use it everywhere. Clamp it or free set it to level duct work, air handlers, furnaces, drain pans, drain line pitch and so much more.



Supco® P/N
TFXUPL

NITROGEN PURGE BOOT

The Nitrogen Purge Boot was designed to assist the technician in the purging and brazing process. O-rings fit and seal over various sizes of ACR tubing creating a "hands-free" and hassle-free solution between your nitrogen regulator and the refrigerant line.

- Works on 3/8", 1/2", 5/8", 3/4", 7/8", and 1 1/8" OD ACR
- O-Rings are compatible with all refrigerant oils and flushing agents



Supco® P/N
TFXNPB

NEW

COOLPRESSOR

High-Powered Magnetic Compressor Cooler

- **NEW!** Convenient valve for flow control at your fingertips
- Uses high powered magnet
- Saves time
- Creates a powerful cascade of water
- No messy backsplash
- Attaches to garden hose

Supco® P/N
CPPRO



EXTENDABLE FILTER BRACES

Holds filters in place to prevent them from being sucked into the return

- Extends from 16" - 31"
- Magnetic ends to hold in place
- Can use multiple braces for added support
- Sold in packs of 6



Supco® P/N
TFXEFB



RAY VALDEZ SUPCO TRADEFOX®

HVAC technician Ray Valdez would often open a return filter grill to find the filter had been sucked up past the flanges. This was problematic because the air restriction could affect the efficiency of the A/C system, and cause other system issues. To fix the issue, he would have to struggle to run two pieces of metal plumbers tape across the area and screw the two ends to make a brace. This took a lot of trial and error and often looked bad. When one of his customers told him he got cut by the straps when changing the filter, Ray was determined to create a product that solved the problem. He invented the magnetic extendable filter braces to be quick, easy and safe.

Ray Valdez is also the inventor of the Magnetic Compressor Cooler.

TRADEFOX® TECHNICIAN-INVENTED PRODUCTS



COIL CLEANING BRUSH

- Two tempered stainless steel cleaning heads built into a single unit
- Adjustable brush head pivots up to 120°
- Patented stiffness adjustment slide
- Handles extends to 4 ft.

Supco® P/N
CCB100



REFRIGERANT LINE CLEANING KIT

Contains everything you need to remove oil from residential and commercial refrigerant lines without messy flushing.

Supco® P/N
RLC100

30 Foam Line Cleaners:

- (5) 1 3/8" (5) 3/4"
- (5) 1 1/8" (5) 5/8"
- (5) 7/8" (5) 1/2"

3 Launchers:

- (1) 1 3/8"
- (1) 7/8"
- (1) 5/8"

4 Adapters:

- (1) 1 3/8" - 1 1/8"
- (1) 7/8" - 3/4"
- (1) 5/8" - 1/2"
- (1) 5/8" - 3/8"



INCLUDES CONVENIENT CARRYING CASE!

(1) Catch Net

REFRIGERANT SAFETY LOCKING CAPS

- No special tools required; uses a standard 3/16" hex key for removal
- Resists fat, grease, oils & solvents
- Compatible with R717, R12, R22, R134a, R404A, R410A and other refrigerants
- Code compliant for tamper resistance
- UV resistant thermoplastic
- Patented cam action cap that easily tightens by hand



MATTHEW GROSS
SUPCO TRADEFOX®

The plastic Safety Locking Caps were invented by Matthew Gross, an HVAC technician who was looking for a more cost efficient way to comply with tamper resistance codes, and make them easier for service techs to install, remove and carry. "The colorful and expensive locking caps I used seemed to draw more attention than less, and I heard several comments from my customers about their high cost. It got me thinking there has to be another way."

Supco® P/N	Description
SFL1402	2 Pack 1/4"
SFL1410	10 Pack 1/4"
SFL1450	50 Pack 1/4"
SFL51602	2 Pack 5/16"
SFL51610	10 Pack 5/16"
SFL51650	50 Pack 5/16"

DISCONNECT MOUNTING PLATE

A universal way to secure the disconnect to the unit, without blocking access to the electrical panel.

- Designed to fit the various layouts of all single phase disconnect boxes using 1/2" length screws
- Cross pattern mounting design allows for universal installation on any caged or stamped condensing or packaged unit
- Uses hex nuts for easy installation with 5/16" nut driver
- Eliminates potential damage to the unit during installation
- Made of weather-resistant galvanized metal



JUSTIN PETRY
SUPCO TRADEFOX®

The Disconnect Mounting Plate was invented by HVAC technician Justin Petry. Justin was inspired during a rooftop installation when he struggled to open the access panel because the disconnect was mounted directly to the door of a split system condenser. He came up with the idea of the mounting plate as a way to firmly and securely mount the disconnect when there is no other suitable mounting structure.

He also created it to help avoid some of the risky problems that can come from makeshift mounting fabrications which may damage a coil or block access to electrical panels.



Supco® P/N
TFXDMP



FLAME SENSOR CLEANER

- Easily cleans sensor
- Prevents false starts
- Convenient key ring

Supco® P/N
FSC10



FURNACE PRO (6 PACK)

- Holds in door switch for troubleshooting furnaces, air handlers, etc.
- Hands-free

Supco® P/N
FPRO100



MagJumper

MAGNETIC TEST LEADS

- Ideal for low voltage, 30V
- Powerful magnets
- 20" wire length

Supco® P/N	Description
MAG1YL	Yellow Leads
MAG1BL	Blue Leads
MAG1BK	Black Leads
MAG1GR	Green Leads
MAG1RD	Red Leads

FUSE TESTING SUPER KIT



- (1) Standard Blade to 1/4" Fuse Adapter
- (1) Standard Blade to 5mm Fuse Adapter
- (1) Standard Blade to 4.5mm Fuse Adapter
- (1) Supco® Fuse Pro 3 AMP Tester with Light
- (1) Supco® Fuse Pro 5 AMP Tester with Light
- Auxiliary Wire Harness

Supco® P/N
BRKPRO

FILTER PULLERS



- Makes getting hard to reach filters easy

Supco® P/N	Description
FP18	18" Extension
FP48	48" Extension



STEVE FISCHER
SUPCO TRADEFOX®

The Magjumper™ was invented by Steve Fischer, a real HVAC technician who wanted to find a way to keep alligator clips from popping off thermostat subbases. He taped magnets to alligator clips and his concept was born. Steve also invented the BRK3 and BRK5 Fuse PROs because he was wasting job time making trips to the gas station for fuses. He came up with the Fuse PRO to take the place of the fuse during low voltage circuit testing until the short is identified.

And, the extendable filter pullers? "I was tired of my clothes getting dirty reaching for filters." Steve said. "Plus, with the magnetic tip, it doubles as a magnetic reach tool." SUPCO manufactures Steve's filter pullers in 18" (FP18) and 48" (FP48) versions.

KNEELING PAD

TradeFox® and Solderweld® have teamed up to offer technicians a high-density, compact kneeling pad designed for optimal comfort so you can focus on the job.

- High-Density EVA foam Construction
- Excellent shock absorption and cushioning
- Compact size and handle for easy carrying and storage
- Dual-sided branding



Supco® P/N
TFXKP

UNIVERSAL TAPE DISPENSER

Keep your tape clean and within reach on the job site with this convenient magnetic tape holder.

- Use with all types of tape up to 3" width
- Magnetic bottom holds securely to metal surfaces
- Serrated cutting edge
- Handy squeegee storage



Supco® P/N
TFXUTD

POCKET CONTINUITY TESTER

- Visual light indicator
- Alarm indicator
- Alligator clips for handsfree use
- Magnet on case sticks to metal surfaces
- Shorter lead length eliminates tangling
- Uses one AAA battery



Supco® P/N
TFXCT

WATER HEATER HANDLES

- Steel "T" shaped handles with 1" female steel threaded end
- Screws onto the inlet and outlet of water heater for secure gripping and carrying
- Includes 1" to 3/4" steel reducer
- Carrying strap acts as a bottom sling for an easier two person lift, especially on stairs



Supco® P/N
TFXWHH

UNIVERSAL ECM TESTER

- 24" wire length
- Short circuit protection
- 24 VAC operating voltage & indicating light
- Convenient magnet on back of unit
- No batteries required

Supco® P/N
ECMPRO

SUPCO TRADEFOX®: BRINGING TECHNICIANS' IDEAS TO LIFE

The ECMPRO was invented by an HVAC technician who was looking for a simple way to check if an Electronically Commutated Motor was good or bad in order to make a quicker diagnosis for the necessary repair.



ATTIC PRO® UTILITY LIFT

- Adjustable beam distance from 14" to 24"
- 20 ft. cable
- Lifts up to 250 lbs.

Supco® P/N
ATP1



STEVE SNYDER SUPCO TRADEFOX®

The Attic PRO® was invented by Steve Snyder, an HVAC technician who was also a fireman. As a one-man operation, he was looking for a way to help lift furnaces and air handlers up into attics. One day on a training exercise, he used a winch to pull a person out of a man-hole - and the Attic PRO idea was born.



INCLUDES CARRYING CASE & STRAPS!

JONES VALVE® CONDENSATE CLEANOUT

- Most compact size on the market
- No cutting or repairing drain line
- Single Schrader allows for one hose hook-up
- 1/4" hose connection, 3/4" condensate line

Supco® P/N
JV1



ANDY JONES SUPCO TRADEFOX®

The Jones Valve® was invented by Andy Jones, an HVAC technician who was looking for a way to permanently mount a multi-directional cleanout device on a condensate line so cleanouts would be faster and easier on service and maintenance calls.

Andy wanted something compact and fast. The theory of being able to service drain lines without having to cut the line influence the International Code Council to change the International Mechanical Code 307.2.5 in 2015 to state "Condensate drain lines shall be configured to permit the clearing of blockages and performance of maintenance without requiring the drain line to be cut".





NEW

DURO HANGER™

ADJUSTABLE HANGING BRACKET

The Duro Hanger™ gives installers an adjustable hanging bracket for steel joists. UL Certified, this system allows for traditional threaded rod or threaded studs with cable hanging systems.

- Faster & Safer - Just adjust all needed Duro Hangers to the correct width and install from below, no need to go up and down on the ladder / lift for every hanger
- 300lbs load rating - 16ga galvanized steel and all RoHS compliant zinc coated fasteners, better weight distribution, and inherent resistance to vibration
- Adjustable to accommodate most major sizes of steel joists; From 3" to 5.75" wide and .125" to .25" thick
- Inventory reducer as this takes the places of several hanging systems
- Patent Pending

Supco® P/N	CODE
DUROHNGR	031032



DURO DYNE® - DYNATITE®




STRUT KITS

ITEM #	LENGTH	COMPONENTS
032058	10 ft	Strut Lock, Threaded Stud, Dual Hanger, Struts
032059	15 ft	Strut Lock, Threaded Stud, Dual Hanger, Struts
032054	10 ft	Strut Lock, Eyelet Cable, Wood Screw, Struts
032055	15 ft	Strut Lock, Eyelet Cable, Wood Screw, Struts

DRIP PAN HANGERS

Supco® P/N
DPH33

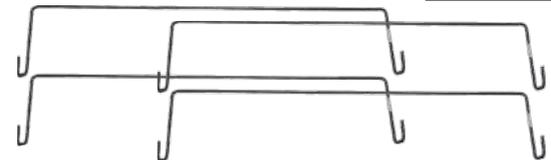

- Holds up to a 33" wide secondary safety pan
- 1/4" Epoxy Coated Steel Rod Construction
- Can be installed on Unistrut up to 1.75" wide
- To be used ONLY in conjunction with a secondary drain, NOT A SAFETY SWITCH
- Minimum 2 hangers used in standard installation
- 4pc/package

EQUIPMENT SUSPENSION KITS

ITEM#	CODE	Description	SAFE WORKING LOAD	END FITTING	CABLE SIZE	CABLE LENGTH	LOCK TYPE	QTY PER BAG	ACCESSORY
TS3310CL4DW	32030	3/8" Threaded Stud WC3 Equipment Suspension Kit	"25 - 150 lbs. (12 - 68 kg.)"	3/8" Threaded Stud	WC3	10 feet	CL Series	4	Dual Hanger Wood
TS3310SL4DW	32002	3/8" Threaded Stud WC3 Equipment Suspension Kit	"25 - 150 lbs. (12 - 68 kg.)"	3/8" Threaded Stud	WC3	10 feet	Strut Lock	4	Dual Hanger Wood
TS3310KV4DW	32038	3/8" Threaded Stud WC3 Equipment Suspension Kit	"25 - 150 lbs. (12 - 68 kg.)"	3/8" Threaded Stud	WC3	10 feet	KV	4	Dual Hanger Wood
TS3410SL4DW	32006	3/8" Threaded Stud WC4 Equipment Suspension Kit	"25 - 250 lbs. (12 - 114 kg.)"	3/8" Threaded Stud	WC4	10 feet	Strut Lock	4	Dual Hanger Wood
E44310CL4WS	32042	45 Degree 1/4" Eyelet WC3 Equipment Suspension Kit	"25 - 150 lbs. (12 - 68 kg.)"	45 Degree 1/4" Eyelet	WC3	10 feet	CL Series	4	2" Wood Screw
E44310SL4WS	32054	45 Degree 1/4" Eyelet WC3 Equipment Suspension Kit	"25 - 150 lbs. (12 - 68 kg.)"	45 Degree 1/4" Eyelet	WC3	10 feet	Strut Lock	4	2" Wood Screw
E44310KV4WS	32046	45 Degree 1/4" Eyelet WC3 Equipment Suspension Kit	"25 - 150 lbs. (12 - 68 kg.)"	45 Degree 1/4" Eyelet	WC3	10 feet	KV	4	2" Wood Screw
E94310SL4WS	-	90 Degree 1/4" Eyelet WC3 Equipment Suspension Kit	"25 - 150 lbs. (12 - 68 kg.)"	90 Degree 1/4" Eyelet	WC3	10 feet	Strut Lock	4	2" Wood Screw
ES4310CL4WS	-	Straight 1/4" Eyelet WC3 Equipment Suspension Kit	"25 - 150 lbs. (12 - 68 kg.)"	Straight 1/4" Eyelet	WC3	10 feet	CL Series	4	2" Wood Screw
LCA310CL400	32060	Looped Cable WC3 Equipment Suspension Kit	"25 - 150 lbs. (12 - 68 kg.)"	Looped Cable	WC3	10 feet	CL Series	5	None

NEW

DURO DYNE[®] Duro-Line[™] STEEL LINE SETS



Duro-Line was designed and developed to MIMIC copper, creating the perfect replacement for copper line sets. Duro-Line's **patented technology** creates the perfect balance of strength and flexibility, coupled with superior roundness that holds its shape, even when cut. This Low Carbon Steel Line Set has built-in corrosion and chemical resistance that is unmatched in the industry. This time-tested technology is why Duro-Line is the better line set.

- Duro-Line's coated low-carbon steel tubing has proven use in the Refrigeration and Automotive industry for over 40 years.
- Proudly Made in USA
- 20-year warranty on the tubing; 5-year warranty on the insulation
- Outstanding Flexibility – Makes routing and installation faster and easier.
- Superior Roundness and Consistency – Ensures smooth refrigerant flow and secure connections.
- Practical – Use all your original tools, no need for special tools.
- Sustainable Strength – Duro-Line is more durable and less susceptible to puncture or penetration.



PART NO.	DESCRIPTION	PART NO.	DESCRIPTION
SLS1451625	1/4 LL, 5/16 SL X 25' W/Insulation	SLS385825	3/8 LL, 5/8 SL X 25' W/Insulation
SLS1451650	1/4 LL, 5/16 SL X 50' W/Insulation	SLS385835	3/8 LL, 5/8 SL X 35' W/Insulation
SLS143815	1/4 LL, 3/8 SL X 15' W/Insulation	SLS385850	3/8 LL, 5/8 SL X 50' W/Insulation
SLS143825	1/4 LL, 3/8 SL X 25' W/Insulation	SLS383425	3/8 LL, 3/4 SL X 25' W/Insulation
SLS143850	1/4 LL, 3/8 SL X 50' W/Insulation	SLS383435	3/8 LL, 3/4 SL X 35' W/Insulation
SLS141215	1/4 LL, 1/2 SL X 15' W/Insulation	SLS383450	3/8 LL, 3/4 SL X 50' W/Insulation
SLS141225	1/4 LL, 1/2 SL X 25' W/Insulation	SLS387825	3/8 LL, 7/8 SL X 25' W/Insulation
SLS141250	1/4 LL, 1/2 SL X 50' W/Insulation	SLS387835	3/8 LL, 7/8 SL X 35' W/Insulation
SLS5165830	5/16 LL, 5/8 SL X 30' W/Insulation	SLS387850	3/8 LL, 7/8 SL X 50' W/Insulation
SLS5165850	5/16 LL, 5/8 SL X 50' W/Insulation	SLS1450U	1/4 Uninsulated Line Set 50'
SLS5163725	5/16 LL, 3/4 SL X 25' W/Insulation	SLS51650U	5/16 Uninsulated Line Set 50'
SLS5163430	5/16 LL, 3/4 SL X 30' W/Insulation	SLS3850U	3/8 Uninsulated Line Set 50'
SLS5163450	5/16 LL, 3/4 SL X 50' W/Insulation	SLS1250U	1/2 Uninsulated Line Set 50'
SLS5167825	5/16 LL, 7/8 SL X 25' W/Insulation	SLS5850U	5/8 Uninsulated Line Set 50'
SLS5167830	5/16 LL, 7/8 SL X 30' W/Insulation	SLS3450U	3/4 Uninsulated Line Set 50'
SLS5167850	5/16 LL, 7/8 SL X 50' W/Insulation	SLS7850U	7/8 Uninsulated Line Set 50'

Other combinations and sizes available by request, including single lines and uninsulated straights and coils.

DURO-LINE[™] STEEL LINE SETS



LINEBACKER®

CAPACITORS

CONTACTORS

FAN RELAYS

POTENTIAL RELAYS

TRANSFORMERS

**WHIPS &
DISCONNECTS**



NEVER SETTLE FOR JUST GOOD ENOUGH

Linebacker® Motor Run Capacitors are built for longevity and performance. Engineered by an ISO certified manufacturer with over twenty years' experience in OEM capacitor fabrication, Linebacker® capacitors come off the same production line as the OEM, and are 100% in-line production tested to the same rigorous international standards.

Built Tough | Meets EIA-456A accelerated life test at 70° C for 60,000 hours

Works Harder | Life tested to 85° C operating temperature for 10,000 cycles

Approved | US and Canada UL approved. File number: E352486 (C22.2NO.190)

Protected | 10,000 AFC pressure sensitive short circuit interrupting capability

Tested | Continuous life tested, oil leak tested and dielectric tested for insulation effectiveness



THE GUTS TO GET IT DONE.

Linebacker® capacitors are manufactured with thick polypropylene foil to handle increased operating temperatures, and PCB-free oil to prevent over-heating.

Voltage	Up to 440 VAC
Standard Tolerance	+/- 5%
Operating Temperature	-40° C to 85° C
Foil Thickness	6.0 µm +/- 5%

SLIM YOUR STOCK

(Trust us, it works.)

A common misconception is that you must have a 370V capacitor to replace a 370V capacitor. However, the voltage rating on a run capacitor displays the voltage that should not be exceeded. Stocking Linebacker® capacitors means with less parts you can handle applications up to 440V, so those 370V applications are good to go. Now you can start making plans for that extra shelf space you've just gained.

WE'VE GOT YOUR BACK.

Premium performance, not price. SUPCO's long-standing reputation in manufacturing and sourcing allows us to offer a top-grade capacitor at extremely competitive market prices.



SINGLE ROUND

Supco® P/N	MF Rating
LCR10X440R	10 MFD X 440V
LCR12.5X440R	12.5 MFD X 440V
LCR15X440R	15 MFD X 440V
LCR17.5X440R	17.5 MFD X 440V
LCR20X440R	20 MFD X 440V
LCR25X440R	25 MFD X 440V
LCR2X440R	2 MFD X 440V
LCR30X440R	30 MFD X 440V
LCR35X440R	35 MFD X 440V
LCR3X440R	3 MFD X 440V
LCR40X440R	40 MFD X 440V
LCR45X440R	45 MFD X 440V
LCR4X440R	4 MFD X 440V
LCR50X440R	50 MFD X 440V
LCR55X440R	55 MFD X 440V
LCR5X440R	5 MFD X 440V
LCR60X440R	60 MFD X 440V
LCR6X440R	6 MFD X 440V
LCR7.5X440R	7.5 MFD X 440V
LCR70X440R	70 MFD X 440V
LCR80X440R	80 MFD X 440V
LCR90X440R	90 MFD X 440V

SINGLE OVAL

Supco® P/N	MF Rating
LCR10X440	10 MFD X 440V
LCR12.5X440	12.5 MFD X 440V
LCR15X440	15 MFD X 440V
LCR17.5X440	17.5 MFD X 440V
LCR2.5X440	2.5 MFD X 440V
LCR20X440	20 MFD X 440V
LCR25X440	25 MFD X 440V
LCR2X440	2 MFD X 440V
LCR30X440	30 MFD X 440V
LCR35X440	35 MFD X 440V
LCR3X440	3 MFD X 440V
LCR40X440	40 MFD X 440V
LCR45X440	45 MFD X 440V
LCR4X440	4 MFD X 440V
LCR50X440	50 MFD X 440V
LCR55X440	55 MFD X 440V
LCR5X440	5 MFD X 440V
LCR60X440	60 MFD X 440V
LCR65X440	65 MFD X 440V
LCR6X440	6 MFD X 400V
LCR7.5X440	7.5 MFD X 440V
LCR70X440	70 MFD X 440V
LCR75X440	75 MFD X 440V
LCR80X440	80 MFD X 440V

DUAL ROUND

Supco® P/N	MF Rating
LCD10+5X440R	10+5 MFD X 440V
LCD15+5X440R	15+5 MFD X 440V
LCD20+15X440R	20+15 MFD X 440V
LCD20+5X440R	20+5 MFD X 440V
LCD25+10X440R	25+10 MFD X 440V
LCD25+15X440R	25+15 MFD X 440V
LCD25+3X440R	25+3 MFD X 440V
LCD25+5X440R	25+5 MFD X 440V
LCD25+7.5X440R	25+7.5 MFD X 440V
LCD30+3X440R	30+3 MFD X 440V
LCD30+4X440R	30+4 MFD X 440V
LCD30+5X440R	30+5 MFD X 440V
LCD30+7.5X440R	30+7.5 MFD X 440V
LCD35+10X440R	35+10 MFD X 440V
LCD35+3X440R	35+3 MFD X 440V
LCD35+4X440R	35+4 MFD X 440V
LCD35+5X440R	35+5 MFD X 440V
LCD35+6X440R	35+6 MFD X 440V
LCD35+7.5X440R	35+7.5 MFD X 440V
LCD40+10X440R	40+10 MFD X 440V
LCD40+3X440R	40+3 MFD X 440V
LCD40+4X440R	40+4 MFD X 440V
LCD40+5X440R	40+5 MFD X 440V
LCD40+6X440R	40+6 MFD X 440V
LCD40+7.5X440R	40+7.5 MFD X 440V
LCD45+10X440R	45+10 MFD X 440V
LCD45+3X440R	45+3 MFD X 440V
LCD45+4X440R	45+4 MFD X 440V
LCD45+5X440R	45+5 MFD X 440V

DUAL OVAL

Supco® P/N	MF Rating
LCD10+5X440	10+5 MFD X 440V
LCD15+4X440	15+4 MFD X 440V
LCD15+5X440	15+5 MFD X 440V
LCD20+15X440	20+15 MFD X 440V
LCD20+5X440	20+5 MFD X 440V
LCD25+10X440	25+10 MFD X 440V
LCD25+5X440	25+5 MFD X 440V
LCD25+7.5X440	25+7.5 MFD X 440V
LCD30+10X440	30+10 MFD X 440V
LCD30+4X440	30+4 MFD X 440V
LCD30+5X440	30+5 MFD X 440V
LCD30+7.5X440	30+7.5 MFD X 440V
LCD35+10X440	35+10 MFD X 440V
LCD35+3X440	35+3 MFD X 440V
LCD35+4X440	35+4 MFD X 440V
LCD35+5X440	35+5 MFD X 440V
LCD35+7.5X440	35+7.5 MFD X 440V


Supco® P/N	MF Rating
LCD45+6X440R	45+6 MFD X 440V
LCD45+7.5X440R	45+7.5 MFD X 440V
LCD50+10X440R	50+10 MFD X 440V
LCD50+12.5X440R	50+12.5 MFD X 440V
LCD50+5X440R	50+5 MFD X 440V
LCD50+7.5X440R	50+7.5 MFD X 440V
LCD55+10X440R	55+10 MFD X 440V
LCD55+5X440R	55+5 MFD X 440V
LCD55+7.5X440R	55+7.5 MFD X 440V
LCD60+10X440R	60+10 MFD X 440V
LCD60+12.5X440R	60+12.5 MFD X 440V
LCD60+15X440R	60+15 MFD X 440V
LCD60+3X440R	60+3 MFD X 440V
LCD60+5X440R	60+5 MFD X 440V
LCD60+7.5X440R	60+7.5 MFD X 440V
LCD65+10X440R	65+10 MFD X 440V
LCD65+5X440R	65+5 MFD X 440V
LCD70+10X440R	70+10 MFD X 440V
LCD70+5X440R	70+5 MFD X 440V
LCD70+7.5X440R	70+7.5 MFD X 440V
LCD75+10X440R	75+10 MFD X 440V
LCD75+5X440R	75+5 MFD X 440V
LCD75+7.5X440R	75+7.5 MFD X 440V
LCD80+10X440R	80+10 MFD X 440V
LCD80+5X440R	80+5 MFD X 440V
LCD80+7.5X440R	80+7.5 MFD X 440V
LCD85+10X440R	85+10 MFD X 440V
LCD85+5X440R	85+5 MFD X 440V
LCD85+7.5X440R	85+7.5 MFD X 440V

Supco® P/N	MF Rating
LCD35+8.5X440	35+8.5 MFD X 440V
LCD40+3X440	40+3 MFD X 440V
LCD40+5X440	40+5 MFD X 440V
LCD40+7.5X440	40+7.5 MFD X 440V
LCD45+5X440	45+5 MFD X 440V
LCD45+7.5X440	45+7.5 MFD X 440V
LCD50+5X440	50+5 MFD X 440V
LCD50+7.5X440	50+7.5 MFD X 440V
LCD55+10X440	55+10 MFD X 440V
LCD55+5X440	55+5 MFD X 440V
LCD60+5X440	60+5 MFD X 440V
LCD60+7.5X440	60+7.5 MFD X 440V
LCD65+10X440	65+10 MFD X 440V
LCD65+7.5X440	65+7.5 MFD X 440V
LCD80+10X440	80+10 MFD X 440V
LCD80+5X440	80+5 MFD X 440V
LCD80+7.5X440	80+7.5 MFD X 440V

UNIVERSAL TRANSFORMER

- | 50/60 Hz
- | Enclosed frame - plate, foot or knock-out mount
- | Includes 4"x4" mounting plate, wire nuts, 1/2" conduit & 8" leads

Supco® P/N	VAC	Primary VAC	Secondary VAC	H	W	D	MW
T45	48	120/208/240	2.5, 8, 12, 16 & 24	2 1/16"	3 1/4"	2 3/4"	2 13/16"

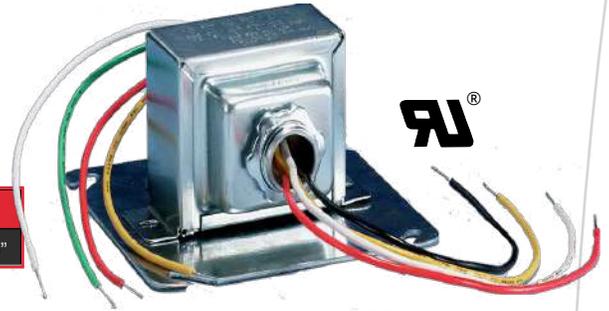

CONTROL TRANSFORMERS


Supco® P/N	Primary VAC	Secondary VAC	Output VAC	Breaker/Fuse	Agency
SXT100R	120/208/240/480	24	100	Breaker	UR®
SXT101	120/208/240	2.5/12/24	40	Fuse	UR®
SXT105	120/208/240	24	40	No	UR®
SXT114	120/208/240	24	20	No	UR® CSA®
SXT115*	120/208/240	24	40	No	UR® CSA®
SXT116	120	24	40	No	UR® CSA®
SXT79R	120/208/240/480	24	75	Breaker	UR®

*Includes Metal Shroud



MULTI-MOUNT TRANSFORMERS

Supco® P/N	Primary VAC	Secondary VAC	Output VAC	Breaker/Fuse
SXT106	120/208/240	24	40	No
SXT111	120/208/240	2.5/12/24	40	Fuse
SXT113	208/240	40	40	No
SXT148	120/208/240	2.5/12/24	48	No
SXT150	120/208/240	24	50	Fuse

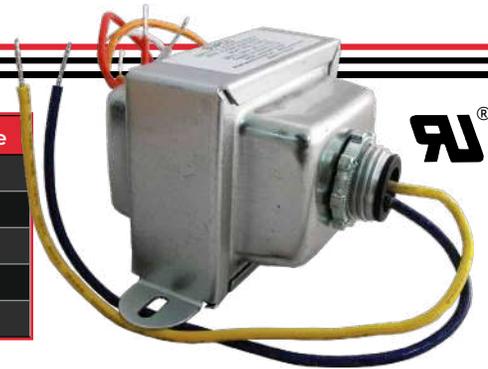

UNIVERSAL FAN CENTERS

- | DPDT plug-in style relay (90340) | Color coded wiring for easy installation
- | 40 VA transformer | Universal FC4031 includes multi-tap primary voltages for all applications, reduces inventory
- | Mounts directly to 4" x 4" electrical box

Supco® P/N	VAC	Primary VAC	Secondary VAC	HP	Jard®	Mars®	Steveco®
FC4011	40	120	24	3/4	4011FC	24013	90-113
FC4031	40	120/208/240	24	3/4	4031FC	24010	90-130



References to original equipment and other manufacturers' names, models, trademarks and part numbers are used for identification purposes only and SUPCO® replacement products are not in any way affiliated, endorsed or sponsored by such manufacturers.

POTENTIAL RELAYS

POTENTIAL RELAYS

UNIVERSAL POTENTIAL RELAYS

(wire-to-wire)




SUPR

UNIVERSAL POTENTIAL RELAY
Time Function
Electronic Potential Relay (EPR)
1.0 to 1.5 Seconds
110 - 270 VAC
30 AMPS
Single-Phase Up to 5hp
Screw-On or Push-On
Universal Mounting Bracket
1.75"W x 2.25"L x 1.50"H

| UL® File no: E146162

RELAY TYPE
RELAY TECHNOLOGY
SAFETY TIMEOUT
OPERATING VOLTAGE
AMPERAGE
MOTOR POWER RATING
TERMINALS
MOUNTING
DIMENSIONS

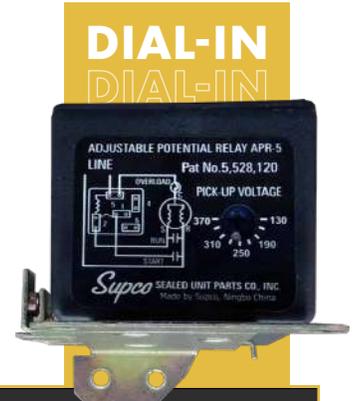

APR5

ADJUSTABLE POTENTIAL RELAY
Adjustable Voltage Sensing
Electronic Potential Relay (EPR)
1.0 to 1.5 Seconds
110 - 270 VAC
30 AMPS
Single-Phase Up to 5hp
Screw-On or Push-On
Universal Mounting Bracket
1.75"W x 2.25"L x 1.50"H

SUPCO® LINEBACKER® POTENTIAL RELAYS

90XX SERIES POTENTIAL RELAYS

| Voltage sensitive relay

| Safety time delay

| UL® Approval: E146162

| Instant re-start

| Use with any size suitable start capacitor

Supco® P/N	Continuous Coil Voltage	Pick-Up Min.	Pick-Up Max.	Drop Max.
9063	168	140	153	45
9064	395	242	272	140
9065	332	171	184	90
9066	395	204	233	130
9067	420	280	310	121
9068	502	314	342	135
9069	338	180	195	105
9070	332	285	305	85
9071	420	223	259	121



GENERAL PURPOSE FAN RELAYS

General Purpose Fan Relays used on many HVAC/R and Industrial applications.

- | Single or Double Pole
- | UL® Approval: E315222
- | Meets All Safety Requirements

Supco® P/N	Type	FLA 250V	LRA 250V	Coil Voltage
90290	SPST	8	18	24V
90291	SPST	8	25	120V
90292	SPST	8	25	240V
90293	SPDT	8	18	24V
90294	SPDT	8	25	120V
90295	SPDT	8	25	240V

Supco® P/N	Type	FLA 125V	LRA 125V	FLA 250V	LRA 250V	Coil Voltage
90370	SPDT	12	60	8	48	24V
90372	SPDT	14	84	8	48	120V
90374	SPDT	14	84	8	48	240V
90380	NO/NC	12	60	8	48	24V
90382	NO/NC	12	60	8	48	120V
90384	NO/NC	12	60	8	48	240V



SUPCO® LINEBACKER® FAN RELAYS

903X SERIES SWITCHING FAN RELAYS

(double pole double throw)

Provides general purpose switching for refrigeration and air conditioning equipment and appliances. UL File No: E328772

Supco® P/N	Coil Voltage	FLA 120V	FLA 208V	FLA 240V	FLA 277V	HP	Essex®/RBM®	Honeywell®
90340	24	13.8	7.6	6.9	6	3/4	90-340	R8222D1014
90341	120	13.8	7.6	6.9	6	3/4	90-341	R4222D1013
90342	208/240	13.8	7.6	6.9	6	3/4	90-342	R4222N1021



References to original equipment and other manufacturers' names, models, trademarks and part numbers are used for identification purposes only and SUPCO® replacement products are not in any way affiliated, endorsed or sponsored by such manufacturers.

DEFINITE PURPOSE CONTACTORS

Designed for use in HVAC&R system and available in 1.5, 2 and 3 pole configurations from 20 through 90 full amps. Compact universal design allows replacement of the most common brands.

- | Silver cadmium oxide contacts
- | Space saving dimensions
- | Compact universal design and interchangeable mounting plate allow for easy replacement of most brands.
- | Economically priced
- | A2L Certified File Number: E328772



1.5 POLE

Supco® P/N	Full Load Amps	Coil Voltage
DP25241	25	24
DP251201	25	120
DP252401	25	240
DP30241	30	24
DP301201	30	120
DP302401	30	240

2 POLE

Supco® P/N	Full Load Amps	Coil Voltage
DP20242	20	24
DP201202	20	120
DP202402	20	240
DP25242	25	24
DP251202	25	120
DP252402	25	240
DP30242	30	24
DP301202	30	120
DP302402	30	240
DP40242	40	24
DP401202	40	120
DP402402	40	240

3 POLE

Supco® P/N	Full Load Amps	Coil Voltage	Supco® P/N	Full Load Amps	Coil Voltage
DP25243	25	24	DP50243	50	24
DP251203	25	120	DP501203	50	120
DP252403	25	240	DP502403	50	240
DP254803	25	480	DP60243	60	24
DP30243	30	24	DP601203	60	120
DP301203	30	120	DP602403	60	240
DP302403	30	240	DP75243	75	24
DP304803	30	480	DP751203	75	120
DP40243	40	24	DP752403	75	240
DP401203	40	120	DP90243	90	24
DP402403	40	240	DP901203	90	120
DP404803	40	480	DP902403	90	240

2 POLE MAGNETIC LINE CONTACTOR



Designed to replace 2 pole, 30 amp contactors used in AC and electric heat applications to control the blower motors.

Supco® P/N
SMC11

- | Non-Positional
- | Includes 4 Terminals and 4 Screws
- | Replaces Mars® 18001 (exact) and Honeywell® R850B1146, Packard® C18001
- | UL® File Number E328772

3 POLE AUXILIARY SWITCH (for contactors)



Used to add additional load switching capability for other low load accessories that need to be controlled with the start/stop sequence of the equipment.

UL® File Number: E328772

Supco® P/N	Contactors	Current	Switch Action
DPAUX1	25A to 40A	10A at 300 VAC	SPDT (1)
DPAUX2	25A to 40A	10A at 300 VAC	SPDT (2)
DPAUX3	25A to 40A	10A at 600 VAC	(1) SPNO, (1) SPNC
DPAUX4	25A to 40A	10A at 600 VAC	SPNO (2)
DPAUX5	50A to 60A	10A at 300 VAC	SPDT (1)
DPAUX6	75A to 90A	10A at 300 VAC	SPDT (2)

References to original equipment and other manufacturers' names, models, trademarks and part numbers are used for identification purposes only and SUPCO® replacement products are not in any way affiliated, endorsed or sponsored by such manufacturers.

WHIPS & DISCONNECTS

HVAC/ELECTRICAL WHIPS | NON-METALLIC

- | Three distinct wire colors for easy hook-up
- | (1) Straight Non-Metallic Connector
- | (1) 90° Non-Metallic Connector
- | Liquid Tight Conduit

USE WITH:

- Air Conditioners
- Heat Pumps
- Motors
- Swimming Pools
- Hot Tubs
- Similar Equipment

CONNECTOR STYLE	1-STRAIGHT, 1-90°
CONNECTOR TYPE	LIQUID TIGHT
MAX VOLTS	600
	3-10AWG
WIRE TYPE	2-8AWG, 1-10AWG
UL LISTED	YES



Supco® P/N	Description	Gauge	Length	Diameter	Type
WPNM8G344	HVAC/Electrical Whip	8GA	4'	3/4"	Non Metallic
WPNM8G346	HVAC/Electrical Whip	8GA	6'	3/4"	Non Metallic
WPNM8G348	HVAC/Electrical Whip	8GA	8'	3/4"	Non Metallic
WPNM10G124	HVAC/Electrical Whip	10 GA	4'	1/2"	Non Metallic
WPNM10G126	HVAC/Electrical Whip	10 GA	6'	1/2"	Non Metallic
WPNM10G128	HVAC/Electrical Whip	10 GA	8'	1/2"	Non Metallic

NON-FUSED METALLIC DISCONNECT

- | Non-Fused
- | NEMA Rating 3R
- | Heavy Gauge Steel
- | Folding Pivot Locking Tab
- | Bottom, Side and Rear Knockouts
- | Applications: HVAC/R, Pools, Hot Tubs, and Outdoor Lighting

VOLTS	240V
AMPS	60A
PHASES	SINGLE
FUSE	NON-FUSED
NEMA RATING	TYPE 3R
UL LISTED	YES
SALT SPRAY TEST	QUALIFIED 72 HOURS
# KNOCKOUTS	6 X 1"



SUPCO® P/N:
DISC60NF

NEW

HOT BLOCK POCKET BLOCK

- 4 oz of Hot Block material - Just enough to protect TXVs, and all heat sensitive areas.
- Fits in your back pocket.

Supco® P/N

SW-HBP



HOT BLOCK HEAT ABSORPTION PUTTY



As a 100% re-usable and non-toxic heat-absorbing putty, Hot Block will block direct and conductive heat transfer on all types of surfaces and metals, including joints, valves, fittings, composite panels, rubber, and plastics. Stops the transfer of heat up to 3000° F.

Supco® P/N

SW-HB1

LB ECONOMY SIZE

**#BLOCKTHEBURN
IN A BIG WAY.**

FLAME RESISTANT MAGNETIC BLANKET



The SolderWeld® Magnetic Flame Resistant Blanket contains firm grip magnets, grommets, kevlar reinforced stitching and an opening slit so it can be easily snapped into place and removed during repairs.

Supco® P/N

SW-MFRB

ALUMINUM COIL TECH REPAIR KITS

Supco® P/N	Description
SW-MBKB	Master Brazing Kit - Black
SW-MBKC	Master Brazing Kit - Camo
SW-ACRTB	Alum Coil Repair Tech Bag - Black
SW-ACRTC	Alum Coil Repair Tech Bag - Camo



The most popular solution for aluminum coil repair. Convenient straps attach directly to belt or bag. The answer to roof top units and tight spots.



HVAC ALL-IN-ONE KITS & ACCESSORIES

Supco® P/N	Description
SW-HVAK05	5% Sil-Phos HVAC All-In-One Brazing Kit
SW-HVAK15	15% Sil-Phos HVAC All-In-One Brazing Kit
SW-STOBC	Rip & Grip Orange Canister Holder

Air tight and water tight canister helps keep all brazing material safe and in one place. All include the "Game Changing" Aluminum to Copper rods. Sil-Phos options also available. Orange canister holder sold separately.



BRAZING ROD SAVER

Supco® P/N
SW-RS

The Solderweld® RS works with most round and flat brazing and soldering rods. As a holder and a feeder, it makes it possible to safely work with small sections of brazing and soldering rods - even pieces smaller than an inch.

- Holds and dispenses brazing rods
- Keeps fingers safe from heat
- Get the most out of each rod - use it down to the last bit!
- Works with most brazing and soldering rods, round or flat
- Fits perfectly in Solderweld® Tech Repair Kits
- Made of lightweight aluminum
- Ergonomic design

SILVER SOLDERS	
Supco® P/N	Description
SW-SS05F1K	SIL SOL 5% Sil-Phos Flat, 1 lb.
SW-SS05F14K	SIL SOL 5% - Sil-Phos 1/2 lb Sleeve Flat
SW-SS15F1	SIL SOL 15% Sil-Phos Flat, 1 lb.
SW-SS1512K	SIL SOL 15% Sil-Phos 1/2 lb Sleeve Round
SW-SS5602K	SIL SOL 56% Flux Coated Round, 2 Rod Pack
SW-SS5610K	SIL SOL 56% Flux Coated Round, 10 Rod Pack



Silver phosphorous rods for day-to-day copper brazing. No flux necessary. Available in flat and the highly preferred round rods with better flow for more effective joints.

The 56% flux coated "King of Brazing" rods allow for brazing of dissimilar metals such as copper to brass or stainless steel to copper.

ALUMINUM TO COPPER BRAZING	
Supco® P/N	Description
SW-ALCU5.5	AL-COP Braze 8", 5 Rod Pack
SW-ALCU5K	AL-COP Braze 18", 5 Rod Pack



The only Aluminum-to-Copper brazing rods on the market. Flux core and proven time and time again to be the solution to copper to aluminum transitions.

LOW TEMP DISSIMILAR METAL SOLDER	
Supco® P/N	Description
SW-MS09305K	Multi SOL 18", 5 Rod Pack
SW-MSF2	Multi SOL FLUX .7oz



350°, 20,000 PSI RATING



ALUMINUM REPAIR	
Supco® P/N	Description
SW-AS09305.5	Alloy SOL 8", 5 Rod Pack
SW-AS09305K	Alloy SOL 18", 5 Rod Pack HVAC Kit
SW-AS09310K	Alloy SOL 18", 10 Rod Pack Kit Top
SW-ASF1	Alloy SOL Flux™ White Aluminum Brazing and Soldering Flux
SW-ABFC05K	Alloy Braze Flux Cored Aluminum Repair 18", 5 Rod Pack

PIPE VISE™

PIPEVISE.COM

PREMIUM PIPE TOOLS FOR PROFESSIONALS

PIPE VISE™ PREMIUM PIPE TOOLS

8 - 19mm Nut Capacity
Self-Adjusting Micro Wrench

SUPCO® P/N: SW127-14



MICRO 5

1.5" Cap. Portable
Steel Pipe Vise

SUPCO® P/N: PV01



BIGFOOT

1.5" Cap. Portable
Alum. Pipe Vise

SUPCO® P/N: APV01



BIGFOOT ULTRALIGHT

2" Cap. Portable
Alum. Pipe Vise

SUPCO® P/N: APV02



ROUGHNECK

1" Cap. Self Adjusting
Alum. Pipe Wrench

SUPCO® P/N: ASW7-1



AMIGO

1" Capacity Self-Adjusting
Steel Pipe Wrench

SUPCO® P/N: SW12-1S



AMIGO SLIM

8 - 19mm Nut Capacity
Extended Reach Self-
Adjusting Micro Wrench

SUPCO® P/N: SW254-14



MICRO 10

Micro Stubby
with Bit Driver

SUPCO® P/N: SW72-19



MICRO STUBBY

6-13 MM Nut Capacity
Micro Mini Wrench

SUPCO® P/N: SW78-13



NEW

MICRO MINI

TR1 Tool Roll (tools included)

SUPCO® P/N: TR1-CY-KIT



NEW

SUPCO® P/N	ITEM DESCRIPTION
PV02	BOSS 2" Capacity Portable Steel Pipe Vise
MV02	BOSS MOUNTABLE 2" Capacity Mountable Steel Pipe Vise
MV05	BIG BOY MOUNTABLE 5" Capacity Mountable Steel Pipe Vise
APV05	BIG BOY 5" Capacity Heavy Duty Portable Aluminum Pipe Vise
ASW24-3	THOR 3" Capacity Heavy Duty Self Adjusting Aluminum Pipe Wrench
APW14	14" Aluminum Pipe Wrench
OAPW14	14" Aluminum Offset Pipe Wrench
SW7-1	AMIGO STEEL 1" Capacity Compact Self-Adjusting Pipe Wrench
SW16-1	AMIGO XL 1" Capacity Extended Leverage Self-Adjusting Steel Pipe Wrench
BWS-1	Basin Wrench Socket
WPP10	10" Slim Jaw Pliers
14CF-19	MICRO CROWFOOT Socket 8-19MM
TR1-CY	TR1 Tool Roll (tools not included)
PVB-GO	Pipe Vise Go Bag
DM1819-CY	Drop Mat (tools not included)
P-CY-SW7-1S	Amigo Slim Pouch (tools not included)
HOL-SW127-COY	MICRO 5 POUCH (tools not included)
HOL-SW254-COY	MICRO 10 POUCH (tools not included)
HOL-SW127-254-COY	MICRO 5 AND 10 COMBO POUCH (tools not included)
P-CY-SW72-19	MICRO STUBBY POUCH (tools not included)
PVS1	METAL PIPE THREAD SEALANT



NEW: PUSH-TO-CONNECT REFRIGERANT FITTINGS. FLAME-FREE. TOOL-FREE. PROBLEM-FREE.



SBC14



SBE38



SBE4512



SBF12



SBCR3814



SBER3814



1/4" - 7/8" Couplers · Flares · Elbows · Reducers

MODEL NAME	NOMINAL SIZE	CONNECTION		LENGTH	OUTER DIAMETER		CONNECTION	
		ØA (INCH)	B (INCH)		(HEX)	THREAD		
				ØA (INCH)	B (INCH)	ØC (INCH)	D (INCH)	
COUPLINGS								
SBC14	1/4"	0.250	1.890	1.890	0.787	NONE		
SBC38	3/8"	0.375	1.969	1.969	0.945			
SBC12	1/2"	0.500	2.126	2.126	1.063			
SBC58	5/8"	0.625	2.244	2.244	1.181			
SBC34	3/4"	0.750	2.579	2.579	1.457			
SBC78	7/8"	0.875	2.618	2.618	1.575			
90° ELBOWS								
SBE14	1/4"	0.250	1.161	1.161	0.787	NONE		
SBE38	3/8"	0.375	1.260	1.260	0.945			
SBE12	1/2"	0.500	1.417	1.417	1.063			
SBE58	5/8"	0.625	1.535	1.535	1.181			
SBE34	3/4"	0.750	1.732	1.732	1.457			
SBE78	7/8"	0.875	1.772	1.772	1.575			
45° ELBOWS								
SBE4514	1/4"	0.250	1.024	1.024	-	7/16-20 UNF		
SBE4538	3/8"	0.375	1.181	1.181	-	5/8-18 UNF		
SBE4512	1/2"	0.500	1.339	1.339	-	3/4-16 UNF		
SBE4558	5/8"	0.625	1.398	1.398	-	7/8-14 UNF		
FLARES								
SBF14	1/4"	0.250	1.516	1.516	0.669	7/16-20 UNF		
SBF38	3/8"	0.375	1.634	1.634	0.866	5/8-18 UNF		
SBF12	1/2"	0.500	1.831	1.831	0.945	3/4-16 UNF		
SBF58	5/8"	0.625	2.087	2.087	1.063	7/8-14 UNF		
MODEL NAME	NOMINAL SIZE	CONNECTION PIPE			LENGTH			
		ØA (INCH)	B (INCH)	ØC (INCH)	D (INCH)			
REDUCER COUPLINGS								
SBCR3814	1/4"x3/8"	0.250	0.375	1.969	1.969	-		
SBCR1238	3/8"x1/2"	0.375	0.500	2.165	2.165	-		
SBCR5812	1/2"x5/8"	0.500	0.625	2.362	2.362	-		
REDUCER ELBOWS								
SBER3814	1/4"x3/8"	0.250	0.375	1.024	1.024	1.181		
SBER1238	3/8"x1/2"	0.375	0.500	1.181	1.181	1.339		
SBER5812	1/2"x5/8"	0.500	0.625	1.339	1.339	1.398		

SBI® PUSH-TO-CONNECT REFRIGERANT FITTINGS

Line Markers & Disconnect Clips

SBLM1458



Line Marker 1/4"-5/8"

SBDC1458



Disconnect Clips 1/4"-5/8"

SBLMDC3478



Line Marker/Disconnect Clips 3/4"-7/8"

2025 HEATING PRESEASON TERMS

This promotion is open to most SUPCO products*, not just those featured in this catalog.
Please see footnote for exclusions.



Sale starts September 9, 2025 and runs through November 30, 2025



Receive prepaid freight* with Heating Preseason orders meeting a minimum \$3,500 value.

DISCOUNT OPTIONS AND PROGRAM TERMS

Order Value	Discount	Terms
\$3,500	1%	NET 60
\$7,000	2%	NET 60
**\$10,500	3%	NET 60

**Orders of \$10,500 or more can be split into two purchase orders of \$5,250 each.

PLEASE MARK PURCHASE ORDERS "HPRE25"

Orders must be placed by 11/30/25 and shipped by 12/31/25.

Contact our Customer Service Department to place your order.
p: 800 333 9125 | f: 732 223 1617 | e: orders@supco.com

*Freight Terms: Freight prepaid at the minimum order levels in this special valid only in the contiguous 48 states.

Freight related accessorial charges are the responsibility of the customer. Appt fees, liftgate, etc.

Sea Breeze® equipment is not eligible for Heating Preseason terms or freight. Cash in advance customers are not eligible for Heating Preseason terms or freight.



@sealedunitpartSCO | @supco_hvac | supco.com
P: 800.333.9125 | E: orders@supco.com | F: 800.458.2818