


QUIK-TWISTS

When preparing to suspend HVAC equipment, ductwork or accessories, threaded anchor points are often required. Quik-Twists from Duro Dyne are side or vertical mounted fasteners that provide attachment points for steel threaded rods and other assemblies. There are two variations of Quik-Twists; one for penetrating and threading into steel and one for wood. Each Quik-Twist has a 3/8"-16 threaded hole in the fastener's hex shaped head. Side mounted Quik-Twists have the threaded hole perpendicular to the fastener shaft and passing completely through the fastener head. Vertical mounted Quik-Twists have the threaded hole parallel to the fastener shaft and as deep as the fastener head.

- No pilot hole is needed for Quik-Twists
- All fasteners are zinc plated for corrosion resistance
- Chucks sold seperately for easy installation

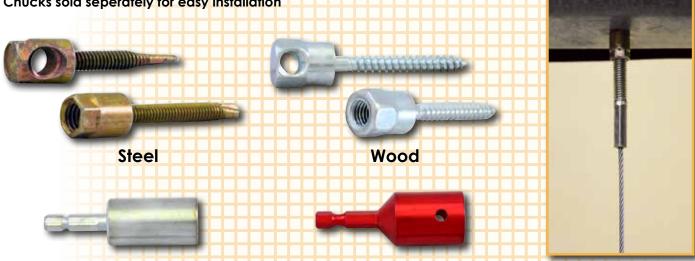

Quik-Twist Ordering Information					
<u>Item #</u>	<u>Code</u>	<u>Description</u>	<u>Packaged</u>		
30224	SHW38-25	3/8" x 2" Wood Side Quik-Twist	25/Ctn.		
30226	VHW38-25	3/8" x 2" Wood Vertical Quik-Twist	25/Ctn.		
30225	SHS38-25	3/8" x 1-1/2" Steel Hanger Quik-Twist	25/Ctn.		
30227	VHS38-25	3/8" x 2" Steel Vertical Quik-Twist - drills 20 ga - 3/16" thick steel	25/Ctn.		
Additional shank lengths and threaded hole sizes available upon request.					

Quik-Twist Accessories Ordering Information				
<u>Item #</u>	<u>Code</u>	<u>Description</u>	<u>Packaged</u>	
30255	DI38T	3/8" Drop In Anchor Set Tool	10/Ctn.	
30256	DI38D	3/8" Drop In Anchor Drill Bit	10/Ctn.	
30260	DI14T	1/4" Drop In Anchor Set Tool	10/Ctn.	
30257	SWR	Driver for Wood Only	5/Ctn.	
30239	CDS	Driver for Steel Only	5/Ctn.	
30259	DI14	1/4" Drop In Anchor	50/Ctn.	
30258	DI38	3/8" Drop In Anchor	50/Ctn.	

Duro Dyne Corporate Headquarters, Bay Shore, NY 631-249-9000 • Fax: 631-249-8346 Duro Dyne Midwest • Duro Dyne West • Duro Dyne Canada www.durodyne.com • E-mail: durodyne@durodyne.com

