SUBMITTAL RECORD_	
JOB	
LOCATION	
SUBMITTED TO	
SUBMITTAL PREPARED BY	
APPROVED BY	
DATE	



Submittal Form Grease Duct Doors

DESCRIPTION

Duro Dyne Grease Duct Doors (GDD) are manufactured to meet or exceed all mechanical codes. They are UL Listed and manufactured of 16 gauge steel. They feature a high temp resistant gasket to ensure the ultimate protection for your grease duct application.

FEATURES


- For installation into grease ducts
- Meets or exceeds requirements of all mechanical codes
- Bolt in unit easily installed into existing ductwork
- Cutout template included
- No bolts penetrate to the interior of the duct
- Two handles for easy removal and installation
- Removeable door panel
- High temperature resistant gasket
- Galvanized steel mill finish
- Mounting frame with studs and wing nuts
- Mild steel mill finish
- Tested to NFPA 96
- \bullet Withstands temperatures up to 2,300°F



UL and ULC listed access door for installation into kitchen exhaust system.

<u>Item #</u>	<u>Code</u>	Description		
13001	DDGD0707UL	7X7 Grease Duct		
13001		Bolt In Access Door		
13002	DDGD0712UL	7X12 Grease Duct		
		Bolt In Access Door		
13003	DDGD0720UL	7X20 Grease Duct		
		Bolt In Access Door		
13004	DDGD1212UL	12X12 Grease Duct		
		Bolt In Access Door		
13005	DDGD1220UL	12X20 Grease Duct		
		Bolt In Access Door		
13006	DDGD1620UL	16X20 Grease Duct		
		Bolt In Access Door		
13007	DDGD2020UL	20X20 Grease Duct		
	DDGD2020UL	Bolt In Access Door		
Doors are packaged 1 per box.				



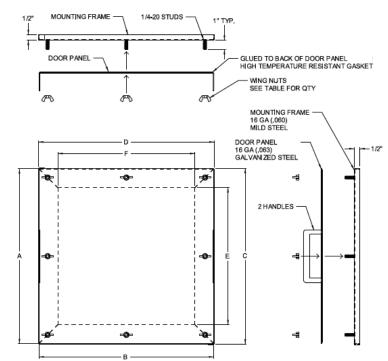

	A	В	С	D	Е	F	NUT QTY
7x7"	10"	10"	10-1/16"	10-1/16"	6-3/4"	6-3/4"	4
7"x12"	10"	15"	10-1/16"	15-1/16"	6-3/4"	11-3/4"	6
7"x20"	10"	23"	10-1/16"	23-1/16"	6-3/4"	19-3/4"	10
12"x12"	15"	15"	15-1/16"	15-1/16"	11-3/4"	11-3/4"	8
12"x20"	15"	23"	15-1/16"	23-1/16"	11-3/4"	19-3/4"	12
16"x20"	19"	23"	19-1/16"	23-1/16"	15-3/4"	19-3/4"	12
20"x20"	23"	23"	23-1/16"	23-1/16"	19-3/4"	19-3/4"	16

