SUBMITIAL RECORD	
JOB	
LOCATION	
SUBMITTED TO	
SUBMITTAL PREPARED BY	
APPROVED BY	
DATE	




## Submittal Form SPECLINE® SRHS/SRS INDICATOR HANDLE STYLE STAMPED REGULATOR SET


## SPECLINE® DAMPER REGULATORS MINIMUM LEAKAGE DAMPER REGULATORS

Specline Regulators are designed for minimum leakage applications. Each regulator is comprised of a frame, an indicator handle, a serrated cast alloy core and a cast alloy nut. Serrations on the cast alloy core mesh with serrations in the frame to firmly lock the regulator in position. A spring washer situated between the core and the cast frame allows for smooth non-binding adjustment. A wedge pin is used to eliminate rattle and take up slack between the regulator and the damper shaft.

•The SRHS and SRS utilize a stamped frame and include a neoprene frame gasket.



## INICATOR HANDLE STYLE (STAMPED) REGULATOR SET WITH HEX NUT & ACORN NUT

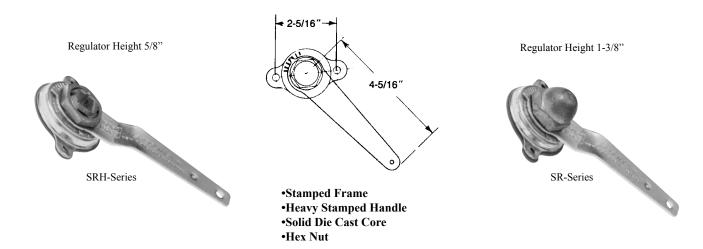

SRHS SERIES HANDLE SET STAMPED					
ITEM#/ <b>BULK</b> #	CODE / BULK CODE	SHAFT SIZE & NUT	QTY / <b>BULK QTY</b>		
8016	SRHS148	1/4" Hex Nut	10 Per Ctn		
8017 / <b>7376</b>	SRHS388 / <i>SRHS388B</i>	3/8" Hex Nut	10 Per Ctn / <b>100 Per Ctn</b>		
8018	SRHS128	1/2" Hex Nut	10 Per Ctn		

SRS SERIES HANDLE SET STAMPED				
ITEM#	MODEL	SHAFT SIZE & NUT	QUANTITY	
8022	SRS148	1/4" Acorn Nut	10 Per Ctn	
8023	SRS388	3/8" Acorn Nut	10 Per Ctn	
8024	SRS128	1/2" Acorn Nut	10 Per Ctn	

